



CE Made in Italy



CATALOGUE
TECHNOLOGY FOR FLUIDYNAMICS
No E14/L6

GREASE

The complete range of our products is presented in the specific catalogues:

- HOSE REELS CATALOGUE N° E14/A1
 - HOSE REELS CATALOGUE N° E14/A2
 - HOSE REELS CATALOGUE N° E14/A3
 - OIL CATALOGUE N° E14/LO
 - DIAPHRAGM PUMPS CATALOGUE N°2013/M
 - DIGITAL METER AND PULSER
 - FCS
-



HELP THE NATURE

Packaging contains, depending on the articles, one or more of the following materials; they must be recycled in accordance with current regulations in the country of use.

cardboard • polyethylene sack • polystyrene • paper • wood • nails
• plastic strap • cellophane • clips • gummed paper





OUR STRENGTHS

The widest range of hose reels designed to meet all the needs of our clients, even the most specific.

The quality, reliability and design that have always distinguished the Ecodora brand in the global market.

The research and development as a flagship of our company to always offer cutting-edge solutions.

A technical service before and after sales to recommend the most suitable product according to the customer's needs as well as to provide support to the end users.

OUR GOALS

To develop a long lasting cooperation with our customers by listening to their needs and their expectations.

To meet every user's need by offering only high quality products.



www.ecodora.com
info@ecodora.com

CE Made in Italy

Index Families



MANUAL GREASE PUMPS

from page **4** to **5**



GREASE PUMPS AND ACCESSORIES

from page **6** to **17**



HOSE REELS FOR GREASE AND ACCESSORIES

from page **18** to **25**



TROLLEYS AND SERVICE COLUMNS

from page **26** to **34**



HOSE REELS FOR AIR/WATER AND ACCESSORIES

from page **35** to **37**

13 KG MANUAL GREASE PUMPS

P/N OE68012

Portable high-pressure 350 - 400 bar hand-operated grease pump, equipped with:
 ▶ tank 13 kg ▶ grease follower plate ▶ 1/4" - 2,5 m hose ▶ rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,060 kg 10,4

OVERALL DIMENSIONS P:340 H:710 L:245 mm

P/N OE68113



Wheel-mounted high-pressure 300 - 350 bar pedal-operated grease pump, equipped with:
 ▶ tank 13 kg ▶ grease follower plate ▶ 1/4" - 2,5 m hose ▶ rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,065 kg 14

OVERALL DIMENSIONS P:520 H:840 L:340 mm



The follower plate, indispensable when using particularly hard greases, is drawn towards the bottom of the drum by the vacuum created by the pump in the grease suction stage

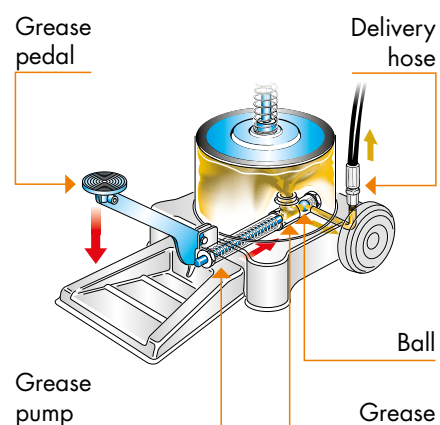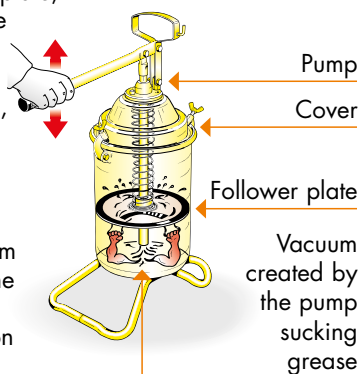


13 KG AIR-OPERATED GREASE PUMPS

P/N OE68213-S




Air-operated grease pump R 50:1, wheel-mounted, equipped with:
 ▶ tank 13 kg ▶ grease follower plate ▶ P/N 935/4 - 1/4" - 4 m hose ▶ P/N OE62041 air pump R 50:1 ▶ P/N OE66892 nipple 1/4" x 3/8" - M/M ▶ P/N OE66888 grease gun with flexible terminal

No.1 packing m³ 0,100 kg 16,7

OVERALL DIMENSIONS P:300 H:840 L:340 mm

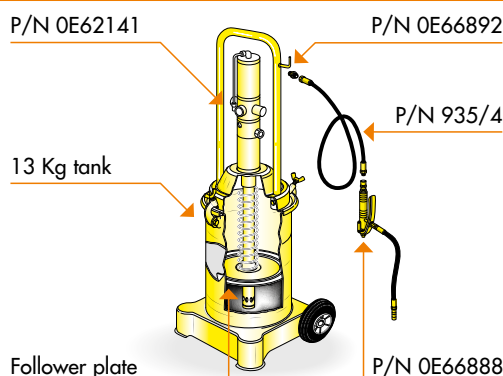

- 1** Greasing of conveyor belt in manufacturing sector
- 2** The pump is fed by compressed air made by the truck
- 3** Greasing of machines tool in engineering industry

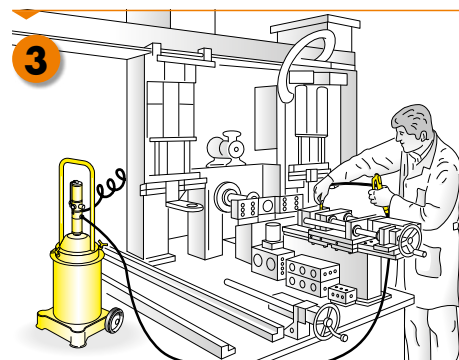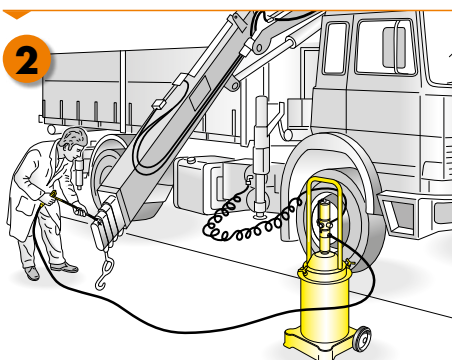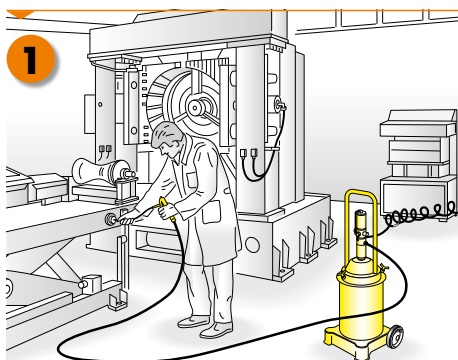

MANUAL GREASE PUMPS

P/N OE60280

Portable high-pressure 350 - 400 bar, hand-operated grease pump for drums of 12 - 20 kg with external $\varnothing$ from 240 mm to 260 mm, equipped with: ► manual pump ► drum cover $\varnothing$ 280 mm ► grease follower plate $\varnothing$ 265 mm ► 1/4" - 2,5 m hose ► rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,022 kg 5,4

OVERALL DIMENSIONS P:350 H:630 L:280 mm

P/N OE60310

Portable high-pressure 350 - 400 bar, hand-operated grease pump for drums of 16 - 30 kg with external $\varnothing$ from 255 mm to 300 mm, equipped with: ► manual pump ► drum cover $\varnothing$ 310 mm ► grease follower plate $\varnothing$ 310 mm ► tubo 1/4" - 2,5 m ► rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,022 kg 6,5

OVERALL DIMENSIONS P:350 H:630 L:310 mm

P/N OE60311

Portable high-pressure 350 - 400 bar, hand-operated grease pump for drums of 16 - 30 kg with external $\varnothing$ from 270 mm to 330 mm, equipped with: ► manual pump ► drum cover $\varnothing$ 337 mm ► grease follower plate $\varnothing$ 310 mm ► 1/4" - 2,5 m hose ► rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,036 kg 7,2

OVERALL DIMENSIONS P:350 H:630 L:337 mm

HAND-OPERATED GREASE TRANSFER PUMPS

P/N OE60410

Portable hand-operated grease transfer pump for drums of 16 - 30 kg with external $\varnothing$ from 255 mm to 300 mm, equipped with: ► hand-operated transfer pump ► drum cover $\varnothing$ 310 mm ► grease follower plate $\varnothing$ 310 mm ► 1/2" - 2 m hose ► dispenser with rigid terminal

No.1 packing m³ 0,030 kg 6

OVERALL DIMENSIONS P:350 H:780 L:310 mm


P/N OE60411

Portable hand-operated grease transfer pump for drums of 16 - 30 kg, with external $\varnothing$ from 270 mm to 330 mm, equipped with: ► hand-operated transfer pump ► drum cover $\varnothing$ 337 mm ► grease follower plate $\varnothing$ 310 mm ► 1/2" - 2 m hose ► dispenser with rigid terminal

No.1 packing m³ 0,040 kg 6,7

OVERALL DIMENSIONS P:350 H:780 L:337 mm

Filling central greasing system

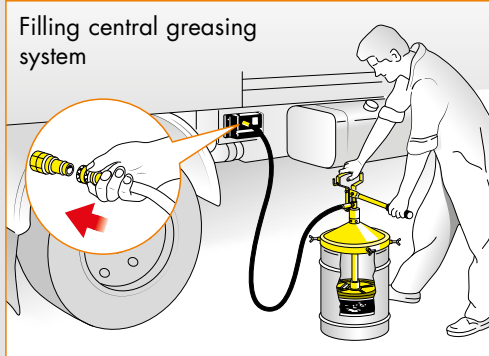

Transfer in small drums




P/N OE60450

Female quick connector, complete with check valve, 1/4" F thread for filling central greasing system. Max pressure 350 bar

P/N OE60451

Male quick connector, complete with check valve, 1/4" F thread for filling central greasing system. Max pressure 350 bar

Quick connect coupling

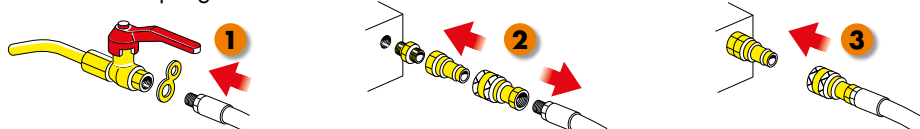


air-operated GREASE pumps




Technology, efficiency and reliability

ECODORA manufactures a wide range of pumps that are (among the) leaders in the market. Innovative design combined with high quality materials guarantee high returns of capacity and pressure. There are three families of pumps offered by ECODORA


- 1**
 - **Pumps S. 600 with 50:1 ratio**
 - Have medium/high head (power) but low capacity
 - Delivery of medium viscosity fluid




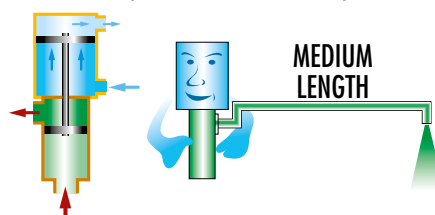


- 2**
 - **Pumps S. 700 with 65:1 ratio**
 - Have high head (power) but low capacity
 - Delivery of medium and high viscosity fluid

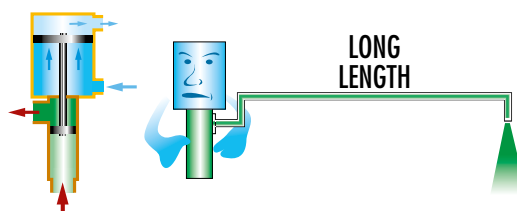

- 3**
 - **Industrial pumps S. 900 and 1200 with ratio from 40:1 to 75:1**
 - Have medium or high head but with high capacity
 - Delivery of medium and high viscosity fluid

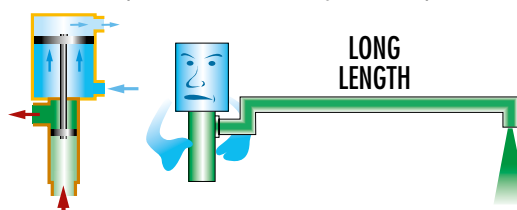

TYPE OF INSTALLATIONS	FOR DRUM 16 - 20 Kg	FOR DRUM 20 - 30 Kg	FOR DRUM 50 - 60 Kg	FOR DRUM 180 - 220 Kg
				


Ratio 50:1
Flow rate 1500 g/min




P/N OE62041-S P/N OE62095-S

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 600

P/N	OE62041	OE62048	OE62074	OE62095
Seals	PU			
Compatible fluids	Greases, medium-high viscosity			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Fluid outlet connection	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	330	330	330
Noise level	dB	81	81	81
Air max pressure	bar	8	8	8
Suitable for drums	Kg	16 - 20	20 - 30	50 - 60
Packing	No. - m ³	1 - 0,010	1 - 0,010	1 - 0,020
Weight	Kg	4,6	4,8	6,1
Dimensions (A - B - C)	cm	26,5 - 41 - 3	26,5 - 48 - 3	26,5 - 74 - 3

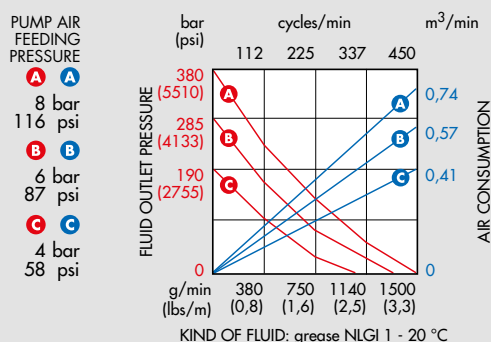

OVERALL DIMENSIONS




Ratio 65:1
Flow rate 1900 g/min




P/N OE63041-S P/N OE63095-S

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 700

P/N	63041	63048	63074	63095
Seals	PU			
Compatible fluids	Greases, medium-high viscosity			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Fluid outlet connection	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	440	440	440
Noise level	dB	81	81	81
Air max pressure	bar	8	8	8
Suitable for drums	Kg	16 - 20	20 - 30	50 - 60
Packing	No. - m ³	1 - 0,010	1 - 0,010	1 - 0,020
Weight	Kg	5,9	6,1	7,4
Dimensions (A - B - C)	cm	33,5 - 41 - 3	33,5 - 48 - 3	33,5 - 74 - 3

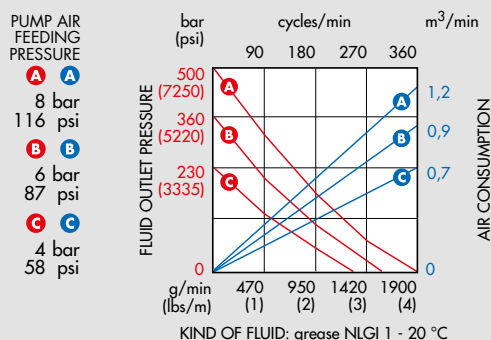

OVERALL DIMENSIONS



Ratio 45:1
Flow rate 4400 g/min





P/N 0E91F/451

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 900

P/N	91F/451
Seals	PU
Compatible fluids	Greases, high viscosity oils
Suction tube upper body	Carbon steel
Suction tube	Carbon steel
Air inlet connection	F 1/2" G
Fluid outlet connection	F 1/2" G
Flow rate	g/min 4400
Max air consumption 8 bar	m ³ /min 1,6
Noise level	dB 80
Air max pressure	bar 8
Suitable for drums	Kg 180 - 220
Packing	No. m ³ 1 - 0,070
Weight	Kg 19
Dimensions (A - B - C)	cm 44,5 - 94 - 4,5

 **Atex 94/9**
II 3 GD c TX

OVERALL
DIMENSIONS

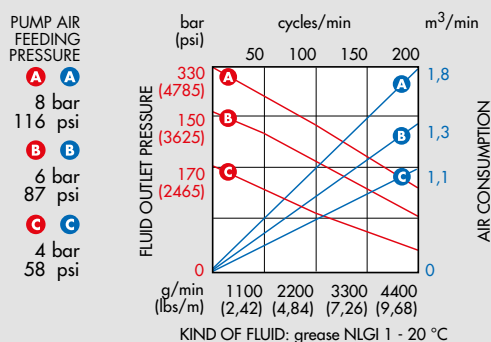

Ratio 70:1
Flow rate 3000 g/min





P/N 0E91C/701

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 900

P/N	91C/701
Seals	PU
Compatible fluids	Greases, high viscosity oils
Suction tube upper body	Aluminium
Suction tube	Carbon steel
Air inlet connection	F 1/2" G
Fluid outlet connection	F 1/2" G
Flow rate	g/min 3000
Max air consumption 8 bar	m ³ /min 1,6
Noise level	dB 80
Air max pressure	bar 8
Suitable for drums	Kg 180 - 220
Packing	No. m ³ 1 - 0,070
Weight	Kg 19
Dimensions (A - B - C)	cm 43 - 94 - 4,5

 **Atex 94/9**
II 3 GD c TX

OVERALL
DIMENSIONS

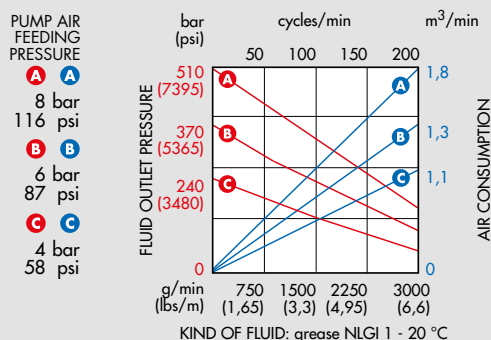

Ratio 75:1
Flow rate 4400 g/min





P/N OE116F/751

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 1200

P/N	OE116F/751
Seals	PU
Compatible fluids	Greases, high viscosity oils
Suction tube upper body	Carbon steel
Suction tube	Carbon steel
Air inlet connection	F 1/2"
Fluid outlet connection	F 1/2"
Flow rate	g/min 4400
Max air consumption 8 bar	m ³ /min 2,8
Noise level	dB 80
Air max pressure	bar 8
Suitable for drums	180 - 220
Packing	No. - m ³ 1 - 0,070
Weight	Kg 21
Dimensions (A - B - C)	cm 44,5 - 94 - 4,5

 **Atex 94/9**
II 3 GD c TX

OVERALL
DIMENSIONS

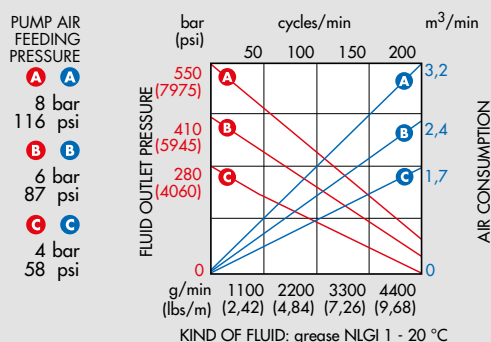

Ratio 40:1
Flow rate 10000 g/min





P/N OE116F/401

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 1200

P/N	OE116F/401
Seals	PU
Compatible fluids	High viscosity oils and greases
Suction tube upper body	Carbon steel
Suction tube	Carbon steel
Air inlet connection	bsp F 1/2"
Fluid outlet connection	bsp F 1/2"
Flow rate	g/min 10.000
Max air consumption 8 bar	m ³ /min 4,6
Noise level	dB 80
Air max pressure	bar 8
Suitable for drums	180 - 220
Packing	No. - m ³ 1 - 0,090
Weight	Kg 25
Dimensions (A - B - C)	cm 44,5 - 94 - 5,08

 **Atex 94/9**
II 3 GD c TX

OVERALL
DIMENSIONS

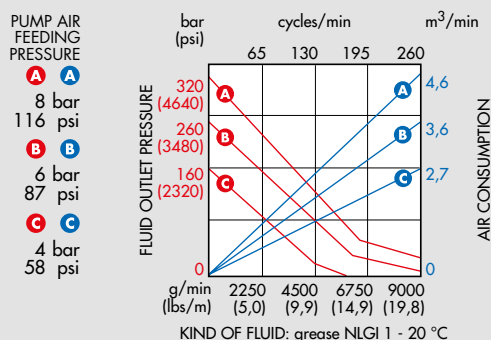



DISPENSING KITS SUITABLE FOR DRUMS 12 - 30 kg


P/N OE64021-S

Portable grease dispenser kit for drums 12 - 30 kg, with external $\varnothing$ 240 - 280 mm, comprising: ►P/N OE62041-S pump R 50:1 - 1500 g/min ►P/N OE66892 nipple M1/4"G x M3/8"G ►P/N 935/4 hose 1/4" - 4 m ►P/N OE66599 kit carrying handle ►P/N OE66888 gun with single swivel joint ►P/N OE65280 drum cover $\varnothing$ 280 mm ►P/N OE66265 follower plate $\varnothing$ 265 mm

No.2 packing m³ 0,030 kg 11

OVERALL DIMENSIONS P:300 H:675 L:300 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 240 to 280 mm




P/N OE64031-S

Portable grease dispenser kit for drums 20 - 30 kg, with external $\varnothing$ 260 - 300 mm, comprising: ►P/N OE62048-S pump R 50:1 - 1500 g/min ►P/N OE66892 nipple M1/4"G x M3/8"G ►P/N 935/4 hose 1/4" - 4 m ►P/N OE66599 kit carrying handle ►P/N OE66888 gun with single swivel joint ►P/N OE65310 drum cover $\varnothing$ 310 mm ►P/N OE66310 follower plate $\varnothing$ 310 mm

No.2 packing m³ 0,025 kg 11,4

OVERALL DIMENSIONS P:330 H:745 L:330 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 260 to 300 mm




P/N OE64032-S

Trolley-mounted grease dispenser kit for drums 20 - 30 kg, with external $\varnothing$ 260 - 300 mm, comprising: ►P/N OE62048-S pump R 50:1 - 1500 g/min ►P/N OE80035 trolley ►P/N OE66892 nipple M1/4"G x M3/8"G ►P/N 935/4 hose 1/4" - 4 m ►P/N OE66888 gun with single swivel joint ►P/N OE65310 drum cover $\varnothing$ 310 mm

No.3 packing m³ 0,040 kg 15

OVERALL DIMENSIONS P:440 H:995 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 260 to 300 mm




P/N OE64033-S

Trolley-mounted grease dispenser kit for drums 20 - 30 kg, same as P/N OE64032-S but with follower plate P/N OE66310

No.3 packing m³ 0,040 kg 17

OVERALL DIMENSIONS P:440 H:995 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 260 to 300 mm




P/N OE64034-S

Trolley-mounted grease dispenser kit for drums 20 - 30 kg, with external $\varnothing$ 300 - 350 mm, comprising: ►P/N OE62048-S pump R 50:1 - 1500 g/min ►P/N OE80035 trolley ►P/N OE66892 nipple M1/4"G x M3/8"G ►P/N 935/4 hose 1/4" - 4 m ►P/N OE66888 gun with single swivel joint ►P/N OE65350 drum cover $\varnothing$ 350 mm

N°3 packing m³ 0,040 kg 15,9

OVERALL DIMENSIONS P:440 H:995 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 300 to 350 mm




P/N OE64035-S

Trolley-mounted grease dispenser kit for drums 20 - 30 kg, same as P/N OE64034-S but with follower plate P/N OE66340

No.3 packing m³ 0,040 kg 17,5

OVERALL DIMENSIONS P:440 H:995 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 300 to 350 mm





DISPENSING KITS SUITABLE FOR DRUMS 20 - 30 kg


P/N OE64036-S

Trolley-mounted grease dispenser kit for drums 20 - 30 kg, with external $\varnothing$ 300 - 350 mm, comprising: ► P/N OE62048-S pump R 50:1 - 1500 g/min ► P/N OE80040 trolley ► P/N OE66892 nipple M1/4"G x M3/8"G ► P/N 935/4 hose 1/4" - 4 m ► P/N OE66888 gun with single swivel joint ► P/N OE65350 drum cover $\varnothing$ 350 mm ► P/N OE66340 follower plate $\varnothing$ 340 mm

No.3 packing m³ 0,040 kg 18,5

OVERALL DIMENSIONS P:430 H:990 L:475 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 300 to 350 mm




P/N OE64033/40-S

Trolley-mounted grease dispenser kit for drums 20 - 30 kg, with external $\varnothing$ 260 - 300 mm, comprising: ► P/N OE62048-S pump R 50:1 - 1500 g/min ► P/N OE80040 trolley ► P/N OE66892 nipple M1/4"G x M3/8"G ► P/N 935/4 hose 1/4" - 4 m ► P/N OE66888 gun with single swivel joint ► P/N OE65310 drum cover $\varnothing$ 310 mm ► P/N OE66310 follower plate $\varnothing$ 310 mm

No.3 packing m³ 0,040 kg 18

OVERALL DIMENSIONS P:430 H:990 L:475 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 260 to 300 mm



DISPENSING KITS SUITABLE FOR DRUMS 50 - 60 kg


P/N OE64037-S

Trolley-mounted grease dispenser kit for drums 50 - 60 kg, with external $\varnothing$ 340 - 385 mm, comprising: ► P/N OE62074-S pump R 50:1 - 1500 g/min ► P/N OE80035 trolley ► P/N OE66892 nipple M1/4"G x M3/8"G ► P/N 935/4 hose 1/4" - 4 m ► P/N OE66888 gun with single swivel joint ► P/N OE65385 drum cover $\varnothing$ 385 mm

No.3 packing m³ 0,048 kg 18

OVERALL DIMENSIONS P:440 H:1060 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 340 to 385 mm




P/N OE64038-S

Trolley-mounted grease dispenser kit for drums 50 - 60 kg, same as P/N OE64037-S but with follower plate P/N OE66370

No.3 packing m³ 0,048 kg 20

OVERALL DIMENSIONS P:440 H:1060 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 340 to 385 mm



P/N OE64040-S

Trolley-mounted grease dispenser kit for drums 50 - 60 kg, with external $\varnothing$ 370 - 420 mm, comprising: ► P/N OE62074-S pump R 50:1 - 1500 g/min ► P/N OE80035 trolley ► P/N OE66892 nipple M1/4"G x M3/8"G ► P/N 935/4 hose 1/4" - 4 m ► P/N OE66888 gun with single swivel joint ► P/N OE65420 drum cover $\varnothing$ 420 mm

No.3 packing m³ 0,048 kg 19

OVERALL DIMENSIONS P:440 H:1060 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 370 to 420 mm




P/N OE64041-S

Trolley-mounted grease dispenser kit for drums 50 - 60 kg, same as P/N OE64040-S but with follower plate P/N OE66400

No.3 packing m³ 0,048 kg 22

OVERALL DIMENSIONS P:440 H:1060 L:395 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 370 to 420 mm



DISPENSING KITS SUITABLE FOR DRUMS 50 - 60 kg

P/N OE64064-S

Trolley-mounted grease dispenser kit for drums 50 - 60 kg, with external $\varnothing$ 370 - 420 mm, comprising:

- P/N OE62074-S pump R 50:1 - 1500 g/min
- P/N OE80050 trolley
- P/N OE66892 nipple M1/4"G x M3/8"G
- P/N 935/4 hose 1/4" - 4 m
- P/N OE66888 gun with single swivel joint
- P/N OE65420 drum cover $\varnothing$ 420 mm
- P/N OE66400 follower plate $\varnothing$ 400 mm

No.3 packing m³ 0,059 kg 22,4

OVERALL DIMENSIONS P:430 H:1145 L:500 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 370 to 420 mm



P/N OE64042-S


Trolley-mounted grease dispenser kit for drums 50 - 60 kg, with external $\varnothing$ 370 - 420 mm, comprising:

- P/N OE62074-S pump R 50:1 - 1500 g/min
- P/N OE80040 trolley
- P/N OE66892 nipple M1/4"G x M3/8"G
- P/N 935/4 hose 1/4" - 4 m
- P/N OE66888 gun with single swivel joint
- P/N OE65420 drum cover $\varnothing$ 420 mm
- P/N OE66400 follower plate $\varnothing$ 400 mm

No.3 packing m³ 0,048 kg 22

OVERALL DIMENSIONS P:430 H:1075 L:475 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 370 to 420 mm



P/N OE64039-S


Trolley-mounted grease dispenser kit for drums 50 - 60 kg, with external $\varnothing$ 340 - 385 mm, comprising:

- P/N OE62074-S pump R 50:1 - 1500 g/min
- P/N OE80040 trolley
- P/N OE66892 nipple M1/4"G x M3/8"G
- P/N 935/4 hose 1/4" - 4 m
- P/N OE66888 gun with single swivel joint
- P/N OE65385 drum cover $\varnothing$ 385 mm
- P/N OE66370 follower plate $\varnothing$ 370 mm

No.3 packing m³ 0,048 kg 21

OVERALL DIMENSIONS P:430 H:1075 L:475 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 340 to 385 mm



DISPENSING KITS SUITABLE FOR DRUMS 180 - 220 kg

P/N OE64070-S


Trolley-mounted grease dispenser unit for drums 180 - 220 kg, with external $\varnothing$ 550 - 600 mm, comprising:

- P/N OE62095-S pump R 50:1 - 1500 g/min
- P/N OE80200 trolley
- P/N OE66892 nipple M1/4"G x M3/8"G
- P/N 935/4 hose 1/4" - 4 m
- P/N OE66888 gun with single swivel joint
- P/N OE65600 drum cover $\varnothing$ 600 mm
- P/N OE65590 follower plate $\varnothing$ 585 mm

No.3 packing m³ 0,120 kg 40,3

OVERALL DIMENSIONS P:670 H:1315 L:770 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 550 to 600 mm



DISPENSING KITS SUITABLE FOR DRUMS 180 - 220 kg

P/N 0E64000-S


Trolley-mounted grease dispenser kit for drums 180 - 220 kg, with external $\varnothing$ 550 - 600 mm, comprising:

- P/N 0E62095-S pump R 50:1 - 1500 g/min
- P/N 0E80201 trolley
- P/N 0E66892 nipple M1/4"G x M3/8"G
- P/N 430/51 hose reel 1/4" - 12 m
- P/N 0E66889 gun with triple swivel joint
- P/N 0E65600 drum cover $\varnothing$ 600 mm
- P/N 0E66590 follower plate $\varnothing$ 585 mm
- P/N 957/2 grease connecting hose

No.4 packing m³ 0,234 kg 86

OVERALL DIMENSIONS P H L P:930 H:1370 L:810 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 550 to 600 mm



P/N 0E64071-S


Trolley-mounted grease dispenser kit for drums 180 - 220 kg, with external $\varnothing$ 550 - 600 mm, comprising:

- P/N 0E62095-S pump R 50:1 - 1500 g/min
- P/N 0E80210 trolley
- P/N 0E66892 nipple M1/4"G x M3/8"G
- P/N 935/4 hose 1/4" - 4 m
- P/N 0E66889 gun with triple swivel joint
- P/N 0E65600 drum cover $\varnothing$ 600 mm
- P/N 0E66590 follower plate $\varnothing$ 585 mm

No.3 packing m³ 0,120 kg 45,8

OVERALL DIMENSIONS P H L P:900 H:1260 L:770 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 550 to 600 mm



P/N 0E64001-S

Trolley-mounted grease dispenser kit for drums 180 - 220 kg, with external $\varnothing$ 550 - 600 mm, comprising:

- P/N 0E62095-S pump R 50:1 - 1500 g/min
- P/N 0E80210 trolley
- P/N 0E66892 nipple M1/4"G x M3/8"G
- P/N 430/51 hose reel 1/4" - 12 m
- P/N 0E66889 gun with triple swivel joint
- P/N 0E65600 drum cover $\varnothing$ 600 mm
- P/N 0E66590 follower plate $\varnothing$ 585 mm
- P/N 957/2 grease connecting hose

No.4 packing m³ 0,234 kg 66

OVERALL DIMENSIONS P H L P:900 H:1260 L:770 mm

FOR DRUMS
WITH EXTERNAL $\varnothing$
from 550 to 600 mm



Ratio 50:1
Flow rate 1500 g/min



DISPENSING KITS SUITABLE FOR DRUMS 180 - 220 kg

P/N OE64200-S

Wall-mounted grease dispenser kit with pump for drums 180 - 220 Kg, with external ø 550 - 600 mm, comprising:

- P/N OE62095-S pump R 50:1 - 1500 g/min
- P/N OE38073 nipple M3/8"G x M3/8"G
- P/N 430/54 hose reel, open version, 1/4" - 12 m
- P/N OE66889 gun with triple swivel joint
- P/N OE65600 drum cover ø 600 mm
- P/N OE66590 follower plate ø 585 mm
- P/N 957/2 connection hose
- P/N OE88630 drip-tray

No.4 packing m³ 0,150 kg 67

FOR DRUMS
WITH EXTERNAL ø
from 550 to 600 mm




P/N OE64210-S

Wall-mounted grease dispenser kit with pump for drums 180 - 220 Kg, with external ø 550 - 600 mm, comprising:

- P/N OE62095-S pump R 50:1 - 1500 g/min
- P/N OE38073 nipple M3/8"G x M3/8"G
- P/N 440/51 hose reel, enclosed version, 1/4" - 12 m
- P/N OE66889 gun with triple swivel joint
- P/N OE65600 drum cover ø 600 mm
- P/N OE66590 follower plate ø 585 mm
- P/N 957/2 connection hose
- P/N OE88630 drip-tray

No.4 packing m³ 0,150 kg 72

FOR DRUMS
WITH EXTERNAL ø
from 550 to 600 mm



DISPENSING KITS SUITABLE FOR DRUMS 180 - 220 kg


P/N OE64195-S

Grease dispenser kit for drums 180 - 220 kg, with external ø 550 - 600 mm, comprising:

- P/N OE62095-S pump R 50:1 - 1500 g/min
- P/N OE66892 nipple M1/4"G x M3/8"GP
- P/N OE66888 gun with single swivel joint
- P/N OE65600 drum cover ø 600 mm
- P/N OE66590 follower plate ø 585 mm
- P/N 932/2 air connecting hose
- P/N 935/4 hose 1/4" - 4 m
- P/N OE37801 air regulator
- P/N OE37805 air quick coupler

No.2 packing m³ 0,060 kg 21


FOR DRUMS
WITH EXTERNAL ø
from 550 to 600 mm



OVERALL DIMENSIONS P:600 H:120 L:600 mm

ADVANTAGES

Grease kits allow you to work with the minimal amount of space, helping you to keep in order your work shop

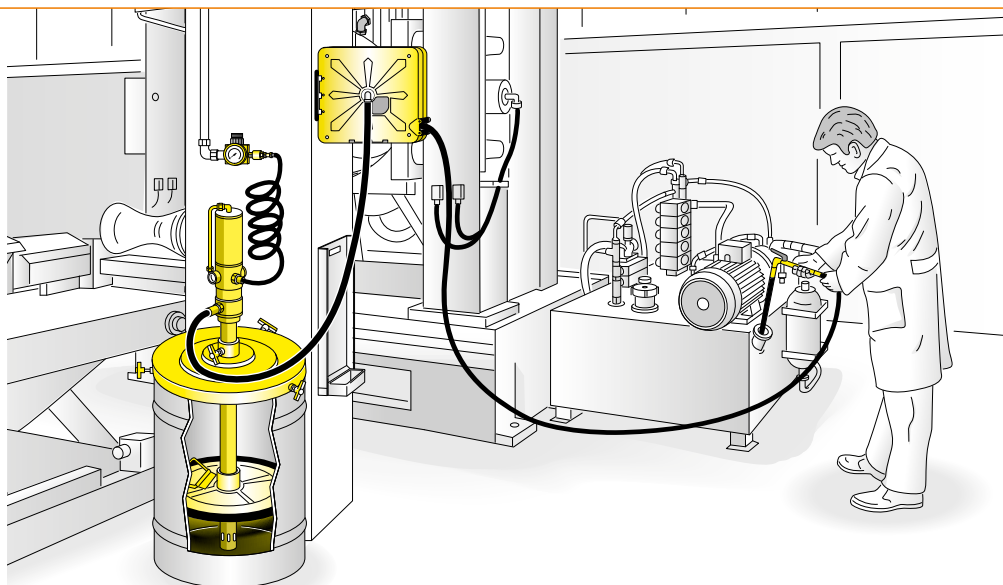

ACCESSORIES FOR GREASE PUMPS

Follower plate for pumps S. 600 - 700 with suction tube ø 30

P/N OE66265

Follower plate ø 265 mm ► drum internal ø 240 - 260 mm

P/N OE66310

Follower plate ø 310 mm ► drum internal ø 255 - 300 mm

P/N OE66340

Follower plate ø 340 mm ► drum internal ø 300 - 330 mm

P/N OE66370

Follower plate ø 370 mm ► drum internal ø 335 - 360 mm

P/N OE66400

Follower plate ø 400 mm ► drum internal ø 360 - 400 mm


P/N OE66590

Follower plate ø 585 mm ► drum internal ø 540 - 580 mm

union ø 30 mm



union ø 45 mm



Follower plate for pumps S. 900 - 1200 with suction tube ø 45

P/N OE10/60

Follower plate ø 585 mm ► drum internal ø 540 - 580 mm


P/N OE10/61

Follower plate ø 400 mm ► drum internal ø 360 - 400 mm

P/N OE10/62

Follower plate ø 370 mm ► drum internal ø 335 - 360 mm

union ø 50,8 mm



Follower plate for pumps S. 1200 - 1500 with suction tube ø 50,8

P/N OE10/65

Follower plate ø 585 mm ► drum internal ø 540 - 580 mm

P/N OE10/66

Follower plate ø 400 mm ► drum internal ø 360 - 400 mm

P/N OE10/67


Follower plate ø 370 mm ► drum internal ø 335 - 360 mm

HOW THE FOLLOWER PLATE WORKS


The **follower plate** is always recommended but becomes indispensable when using particularly hard greases. The follower plate is pulled towards the bottom of the drum by the vacuum created by the pump and always ensures the following advantages:

- 1** it compresses the grease, preventing air pockets from forming and possible cavitation of the pump
- 2** it keeps the grease clean, as well as preserving its characteristics
- 3** it enables collection of all the grease from the bottom of the drum, that would otherwise remain stuck to the sides

WITHOUT FOLLOWER PLATE



WITH FOLLOWER PLATE




The atmospheric pressure at sea-level is 1 bar, equivalent to approx. 1 kg per cm². When the pump sucks the grease from the container, a vacuum is created under the follower plate and, at the same time, depending on the width of its surface, a pressure from 370 kg to 2000 kg is created above it.

Pump

Drum cover

Follower plate

Vacuum created by pump sucking the grease



ACCESSORIES FOR GREASE PUMPS

Drum cover for manual pumps with suction tube ø 25 - 30 - 38

P/N OE65309

Drum cover ø 337 mm

- drums external ø 270 - 330 mm
for P/N OE60311 (suction tube ø 25 mm)

P/N OE65311



Drum cover ø 337 mm

- drums external ø 270 - 330 mm
for P/N OE60411 (suction tube ø 38 mm)


P/N OE65312

Drum cover ø 337 mm

- drums external ø 270 - 330 mm
for pumps with ø 30 mm suction tube



union ø 25 - 30 - 38 mm



Drum cover for pumps S. 600 - 700 with suction tube ø 30

P/N OE65280

Drum cover ø 280 mm

- drums external ø 240 - 280 mm

P/N OE65310

Drum cover ø 310 mm

- drums external ø 260 - 300 mm

P/N OE65350

Drum cover ø 350 mm

- drums external ø 300 - 350 mm

P/N OE65385

Drum cover ø 385 mm

- drums external ø 340 - 385 mm

P/N OE65420


Drum cover ø 420 mm

- drums external ø 370 - 420 mm

P/N OE65600

Drum cover ø 600 mm

- drums external ø 550 - 600 mm



union ø 30 mm



ACCESSORIES FOR GREASE PUMPS

Drum cover for pumps with suction tube $\varnothing$ 45

P/N OE10/50

Drum cover $\varnothing$ 600 mm

► drums external $\varnothing$ 550 - 600 mm

P/N OE10/51


Drum cover $\varnothing$ 420 mm

► drums external $\varnothing$ 370 - 420 mm

P/N OE10/52

Drum cover $\varnothing$ 385 mm

► drums external $\varnothing$ 340 - 385 mm



union $\varnothing$ 45 mm



Drum cover for pumps with suction tube $\varnothing$ 50,8

P/N OE10/55

Drum cover $\varnothing$ 600 mm

► drums external $\varnothing$ 550 - 600 mm

P/N OE10/56


Drum cover $\varnothing$ 420 mm

► drums external $\varnothing$ 370 - 420 mm

P/N OE10/57

Drum cover $\varnothing$ 385 mm

► drums external $\varnothing$ 340 - 385 mm



union $\varnothing$ 50,8 mm



Drum cover with 2" F union suitable for standard bung adaptor

P/N OE65160

Drum cover $\varnothing$ 600 mm

► drums external $\varnothing$ 550 - 600 mm

P/N OE65142


Drum cover $\varnothing$ 420 mm

► drums external $\varnothing$ 370 - 420 mm

P/N OE65138

Drum cover $\varnothing$ 385 mm

► drums external $\varnothing$ 340 - 385 mm



union 2" F



P/N OE66599

Handle for portable grease kit supplied with grease kits P/N OE64021 - P/N OE64031



GREASE

hose reels




Technology, efficiency and reliability

Ecodora's hose reels come with automatic smooth rewinding system thanks to the constant strength spring. They are available in the following versions: open, enclosed, fix or swiveling with the spool made in painted steel or in ABS material.

They allow to manage any kind of flexible hoses in a practical and safest way for transferring every type of fluids. When in use, hose reels allow to unwind quickly only the desired length of hose. After use, the unwound hose can be re-wound immediately by keeping an orderly workplace free of hindrances, thus improving functionality and safety, and safeguarding hoses against wear and breakage too.

For more information about the whole range of Ecodora's hose reels see the specific Hose reels Catalogue.

USES

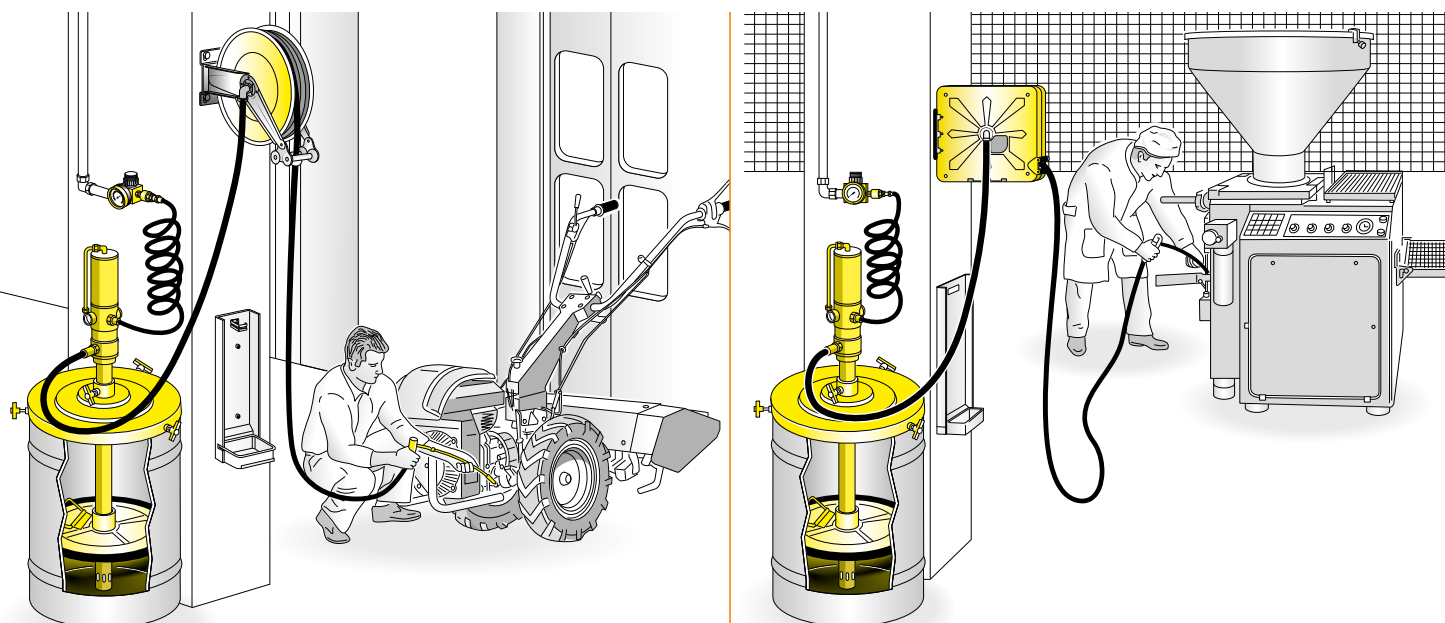



Atex 94/9
II 3 GD c X
(only for series 4430 ABS)

IIB 2 GD c T4 T135°C X



Supplied with:


- hose in black synthetic rubber with galvanized steel coupling
- swivel joint in galvanized steel or s. steel AISI 304
- "Polyurethane" seals
- central shaft in galvanized steel or stainless steel AISI 304
- inlet hose 0,6 m to connect the hose reel to the system (standard on the versions with hose)
- shock proof drum in painted steel or ABS

For the SWIVELLING version add the suffix "/SO" at the P/N.
For example 430/50/SO

INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 430 600 bar	430/50	without hose	F 3/8"G	F 1/2"G
S. 430 400 bar	430/51	12m 1/4" (935/13)	F 3/8"G	M 1/4"G
	430/52	18m 1/4" (935/18)	F 3/8"G	M 1/4"G
	430/55	10m 3/8" (957/10)	F 3/8"G	M 1/4"G
	430/56	15m 3/8" (957/15)	F 3/8"G	M 1/4"G
S. 4430 ABS 600 bar	4430/50	without hose	F 3/8"G	F 1/2"G
S. 430 ABS 400 bar	4430/51	12m 1/4" (935/13)	F 3/8"G	M 1/4"G
	4430/52	18m 1/4" (935/18)	F 3/8"G	M 1/4"G
	4430/55	10m 3/8" (957/10)	F 3/8"G	M 1/4"G
	4430/56	15m 3/8" (957/15)	F 3/8"G	M 1/4"G
S. 530 600 bar	530/50	without hose	F 3/8"G	F 1/2"G
S. 530 400 bar	530/51	20m 3/8" (957/20)	F 3/8"G	M 1/4"G
	530/52	25m 3/8" (957/25)	F 3/8"G	M 1/4"G


OVERALL
DIMENSIONS

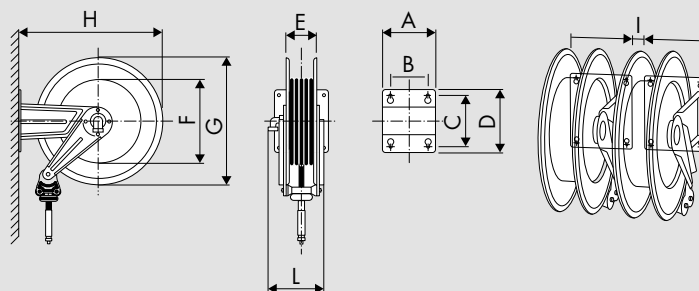

Series	A	B	C	D	E	F	G	H	I	L	1-m ³	Kg
430	186	140	196	226	115	261	420	460	20	215	0,098	from 16 to 22,5
530	203	153	220	258	115	328	510	560	20	230	0,120	from 22 to 31,5

EXAMPLE OF INSTALLATION

Arms may be easily adjusted in different positions depending on the needs

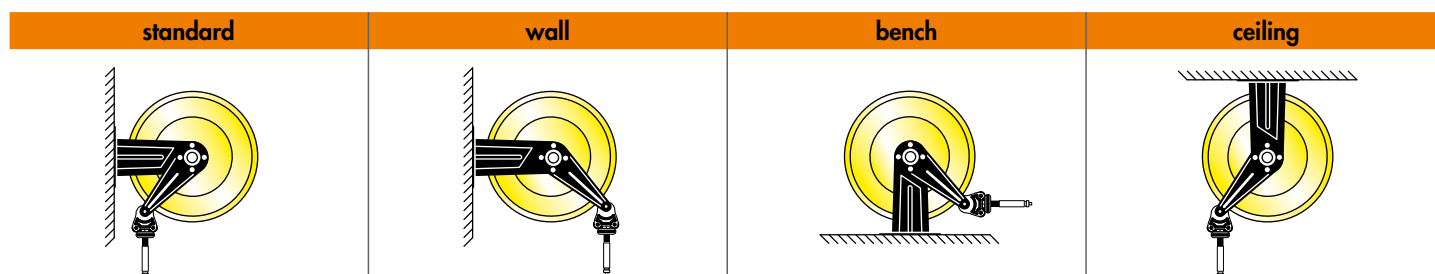

Ex Atex 94/9
II 3 GD c X
(only for series 4440 ABS)


IIB 2 GD c T4 T135°C X



INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 440 600 bar	440/50	without hose	F 3/8"G	F 1/2"G
S. 440 400 bar	440/51	12m 1/4" (935/13)	F 3/8"G	M 1/4"G
	440/52	18m 1/4" (935/18)	F 3/8"G	M 1/4"G
	440/55	10m 3/8" (957/10)	F 3/8"G	M 1/4"G
	440/56	15m 3/8" (957/15)	F 3/8"G	M 1/4"G
S. 4440 ABS 600 bar	4440/50	without hose	F 3/8"G	F 1/2"G
S. 440 ABS 400 bar	4440/51	12m 1/4" (935/13)	F 3/8"G	M 1/4"G
	4440/52	18m 1/4" (935/18)	F 3/8"G	M 1/4"G
	4440/55	10m 3/8" (957/10)	F 3/8"G	M 1/4"G
	4440/56	15m 3/8" (957/15)	F 3/8"G	M 1/4"G

OVERALL
DIMENSIONS

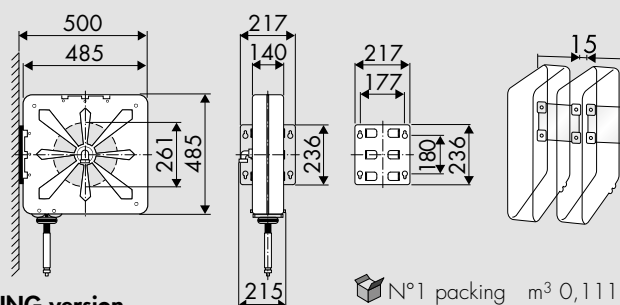


For the **SWIVELLING** version
add the suffix **"/SO"** at the P/N.
For example: 440/50/SO

N°1 packing m³ 0,111 kg da 23 a 29

Supplied with:

- hose in black synthetic rubber with galvanized steel coupling
- swivel joint in brass or galvanized steel
- "Viton" or "Polyurethane" seals
- central shaft in galvanized steel
- inlet hose from 0,6 m to 1m to connect the hose reel to the system (standard on the versions with hose)
- internal shock proof drum in painted steel or ABS

EXAMPLE OF INSTALLATION There are 2 possible positions of the bracket allowing wall, bench or ceiling mounting

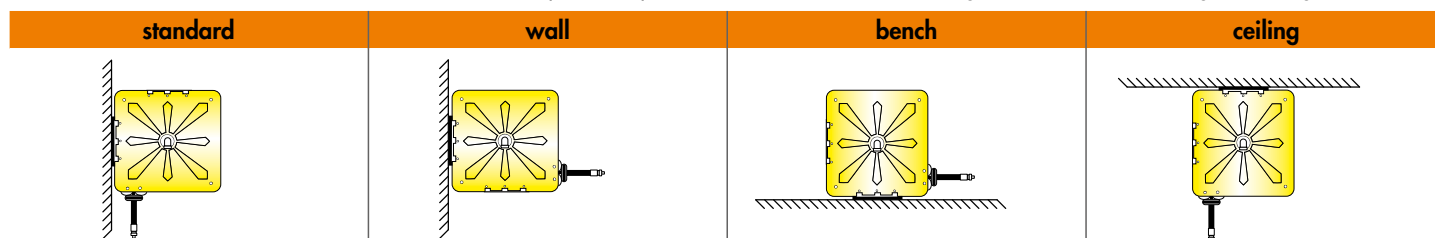


ACCESSORIES FOR HOSE REEL

P/N 900

Modular drip-tray, equipped with hook for gun and removable drip-tray. Applied under the hose reel, it is a handy holder for the delivery gun. Essential for a clean and orderly workplace



P/N 430/05	Painted steel swivelling bracket suitable for hose reels Series 270-300-350-430 ABS
P/N 440/05	Painted steel swivelling bracket suitable for hose reels Series 440-440 ABS
P/N 530/05	Painted steel swivelling bracket suitable for hose reels Series 530-536



P/N	A	B	C	D	E
430/05	162	208	118	165	94
440/05	162	208	118	165	94
530/05	162	208	118	165	94



CONNECTION HOSES

The hoses to be assembled on the hose reels must be suitable for the **working pressures specified on the label**

P/N 932/1	Hose M 1/4" x F 1/4"	▶ ø 1/4"	▶ 1m	▶ 20 bar
P/N 932/2	Hose M 1/4" x F 1/4"	▶ ø 1/4"	▶ 2m	▶ 20 bar
P/N 935/4	Hose M 1/4" x F 1/4"	▶ ø 1/4"	▶ 4m	▶ 400 bar
P/N 935/13	Hose M 1/4" x F 1/4"	▶ ø 1/4"	▶ 12m	▶ 400 bar
P/N 935/18	Hose F 1/4" x F 1/4"	▶ ø 1/4"	▶ 18m	▶ 400 bar
P/N 957/1	Hose M 3/8" x F 3/8"	▶ ø 3/8"	▶ 1m	▶ 400 bar
P/N 957/2	Hose M 3/8" x F 3/8"	▶ ø 3/8"	▶ 2m	▶ 400 bar
P/N 957/06	Hose M 3/8" x F 3/8"	▶ ø 3/8"	▶ 0,6m	▶ 400 bar
P/N 957/10	Hose M 1/4" x F 3/8"	▶ ø 3/8"	▶ 10m	▶ 400 bar
P/N 963/25	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 25m	▶ 150 bar



NIPPLE

P/N 0E66891	Nipple M 1/4"G x M 1/4"G (tapered/cylindrical thread)
P/N 0E66892	Nipple M 1/4"G x M 3/8"G (cylindrical/cylindrical thread)
P/N 0E66893	Nipple M 1/4"G x M 1/2"G (cylindrical/cylindrical thread)



NIPPLE

P/N 0E66895	Nipple M 3/8"G x F 1/4"NPT
P/N 0E66896	Nipple M 1/4"G x M 1/4"NPT
P/N 0E66897	Nipple F 1/4"G x M 1/4"NPT



QUICK CONNECTOR

P/N 0E60450

Female quick connector complete with check valve - F 1/4"BSP - max pressure 350 bar



P/N 0E60451

Male quick connector complete with check valve - F 1/4"BSP - max pressure 350 bar



GREASE GUN WITHOUT TERMINAL

P/N OE66855

Grease gun valve equipped with:

- inlet F 1/4"G

P/N OE66870

Grease gun valve equipped with:

- inlet F 3/8"G

GREASE GUNS WITH RIGID TERMINAL

P/N OE66880

Grease gun with rigid terminal equipped with:

- inlet F 1/4"G ► special 4-jaw grease coupler

P/N OE66881

Grease gun with rigid terminal equipped with:

- inlet F 1/4"G ► P/N OE66661 single swivel joint
- special 4-jaw grease coupler

P/N OE66882

Grease gun with rigid terminal equipped with:

- inlet F 1/4"G ► P/N OE66663 triple swivel joint
- special 4-jaw grease coupler

P/N OE66873

Grease gun with rigid terminal equipped with:

- inlet F 3/8"G ► P/N OE66661 single swivel joint
- special 4-jaw grease coupler

GREASE GUNS WITH FLEXIBLE TERMINAL

P/N OE66860

Grease gun with flexible terminal equipped with:

- inlet F 1/4"G ► special 4-jaw grease coupler

P/N OE66888

Grease gun with flexible terminal equipped with:

- inlet F 1/4"G ► P/N OE66661 single swivel joint
- special 4-jaw grease coupler

P/N OE66889

Grease gun with flexible terminal equipped with:

- inlet F 1/4"G
- P/N OE66663 triple swivel joint
- special 4-jaw grease coupler

P/N OE66876

Grease gun with flexible terminal equipped with:

- inlet F 3/8"G
- P/N OE66661 400 mm single swivel joint
- special 4-jaw grease coupler

	ACCESSORIES FOR GREASE GUN P/N OE66856 Flexible terminal with special 4-jaw grease coupler P/N OE66740
	P/N OE66857 Rigid terminal with special 4-jaw grease coupler P/N OE66740
	P/N OE66661 Straight single swivel joint M/F 1/4"G supplied with grease guns P/N OE66888 - P/N OE66881 P/N OE66665 Straight single swivel joint M/F 3/8"G supplied with grease guns P/N OE66888 - P/N OE66881
	P/N OE66663 Triple swivel joint M/F 1/4"G supplied with grease guns P/N OE66889 - P/N OE66882 P/N OE66667 Triple swivel joint M/F 3/8"G supplied with grease guns P/N OE66889 - P/N OE66882
	P/N OE66739 4-jaw grease coupler with antislash valve fitted standard on manual grease pumps ► inlet M 10x1 P/N OE66740 4-jaw grease coupler fitted standard on all grease guns ► inlet M 10x1
	P/N OE66741 90° grease coupler ► Inlet thread M 10x1
	P/N OE66742 Hooking grease coupler ► Inlet thread M 10x1
	P/N OE66743 Push-on grease coupler ► Inlet thread M 10x1




AIR FLOW REGULATOR

P/N OE37801

Pressure regulator equipped with:

- ▶ pressure gauge ▶ connections M/F 1/4"G.

Applied on a pump or on the tank of a suction/drain, for regulating the compressed air inlet pressure



P/N OE37814

Pressure regulator equipped with:

- ▶ pressure gauge ▶ connections M/F 1/2"G.


Applied on a pump or on the tank of a suction/drain, for regulating the compressed air inlet pressure



P/N OE37818 *

Pressure regulator equipped with:

- ▶ pressure gauge ▶ connections F 3/8"G x F 3/8"G



P/N OE37810 *

Pressure regulator equipped with:

- ▶ pressure gauge ▶ condensate discharge filter
- ▶ connections F/F 1/4"G for application at the start of the compressed air line feeding the pump

P/N OE37819 *

Pressure regulator equipped with:

- ▶ pressure gauge ▶ condensate discharge filter
- ▶ connections F 3/8"G x F 3/8"G

P/N OE37815 *

Pressure regulator equipped with:

- ▶ pressure gauge ▶ condensate discharge filter
- ▶ connections F/F 1/2"G for application at the start of the compressed air line feeding the pump




P/N OE37811 *

Air lubricator equipped with:

- ▶ connections F/F 1/4"G.

Its application guarantees better efficiency of the pump over time



P/N OE37820 *

Air lubricator equipped with:

- ▶ connections F 3/8"G x F 3/8"G



AIR FLOW REGULATOR

P/N OE37812 *

Pressure regulator equipped with:

- ▶ condensate discharge filter ▶ air lubricator
- ▶ pressure gauge ▶ connections F 1/4"G x F 1/4"G

P/N OE37821 *


Pressure regulator equipped with:

- ▶ condensate discharge filter ▶ air lubricator
- ▶ pressure gauge ▶ connections F 3/8"G x F 3/8"G

P/N OE37817 *

Pressure regulator equipped with:

- ▶ condensate discharge filter 1/2"G ▶ air lubricator
- ▶ pressure gauge ▶ connections F 1/2"G x F 1/2"G



P/N OE37803

Air flow regulator equipped with:

- ▶ connection M 1/4"G



QUICK CONNECTOR

P/N OE37805 *

Quick connector F 1/4"G



P/N OE37806

Quick connector M 1/4"G



P/N OE37807 *

Quick connector F 1/2"G



P/N OE37808 *

Quick connector M 1/2"G

* Articles not manufactured by ECODORA

MODULAR TROLLEYS


P/N OE80035

Trolley for drums 20 - 60 Kg

► with 2 wheels

No1 packing m³ 0,010 kg 5

OVERALL DIMENSIONS P:440 H:995 L:395 mm




P/N OE80040

Trolley with double handle for drums 20 - 60 Kg

► with 2 wheels

No1 packing m³ 0,010 kg 6

OVERALL DIMENSIONS P:430 H:990 L:475 mm




P/N OE80050

Trolley for drums 20 - 60 Kg

► with 4 wheels: 2 fixed wheels and 2 castors

No1 packing m³ 0,020 kg 9,2

OVERALL DIMENSIONS P:460 H:990 L:500 mm




P/N OE80200

Light trolley for drums 180 - 220 Kg

► with 4 wheels: 2 fixed wheels and 2 castors

No1 packing m³ 0,060 kg 21,9

OVERALL DIMENSIONS P:670 H:870 L:770 mm



MODULAR TROLLEYS


P/N OE80210

Standard trolley for drums 180 - 220 Kg

► with 4 wheels: 2 fixed wheels and 2 castors (1 with block)

No1 packing m³ 0,18 kg 26,2

OVERALL DIMENSIONS P H L P:900 H:1150 L:770 mm




P/N OE80201

Super trolley for drums 180 - 220 Kg

► with 4 wheels: 2 fixed wheels and 2 castors (1 with block)

No1 packing m³ 0,100 kg 45,9

OVERALL DIMENSIONS P H L P:930 H:1030 L:810 mm




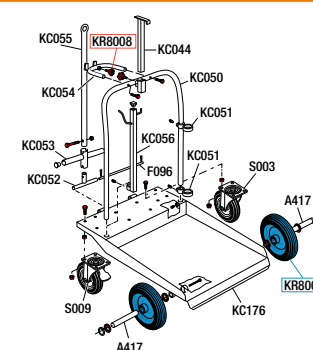


Technical features



Designed to complete our articles such as oil and grease kits

HOW TO USE

P/N OE80035 - P/N OE80040



P/N OE80200 (without block)
P/N OE80201 (with block)
P/N OE80210 (with block)

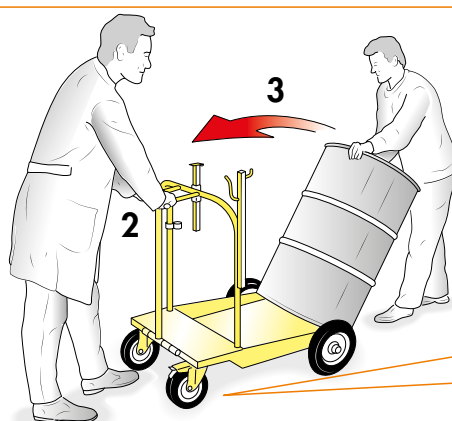

FRONTAL SERVICE COLUMNS

P/N OE39320

Frontal service column ► suitable for suction unit

No1 packing m³ 0,265 kg 41

OVERALL DIMENSIONS P:125 H:2450 L:290 mm

P/N OE39321

Frontal service column ► suitable for 1 hose reel

No1 packing m³ 0,265 kg 42

OVERALL DIMENSIONS P:125 H:2450 L:290 mm

P/N OE39421

Frontal service column ► suitable for 1 hose reel ► made in stainless steel AISI 304

No1 packing m³ 0,265 kg 37

OVERALL DIMENSIONS P:125 H:2450 L:290 mm

P/N OE39322

Frontal service column ► suitable for 2 hose reels

No1 packing m³ 0,265 kg 48,5

OVERALL DIMENSIONS P:130 H:2450 L:620 mm

P/N OE39422


Frontal service column ► suitable for 2 hose reels ► made in stainless steel AISI 304

No1 packing m³ 0,265 kg 44




OVERALL DIMENSIONS P:130 H:2450 L:620 mm



CEILING INSTALLATION

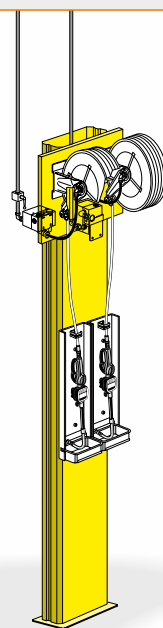

FLOOR INSTALLATION

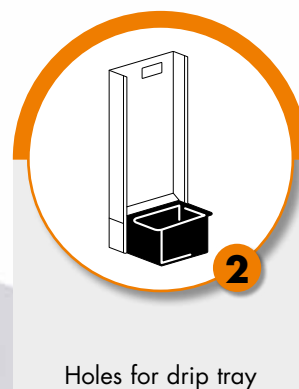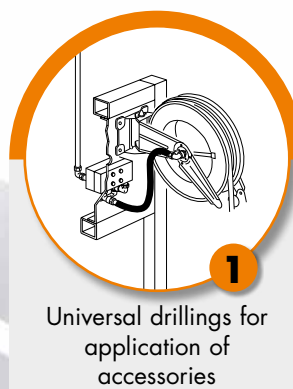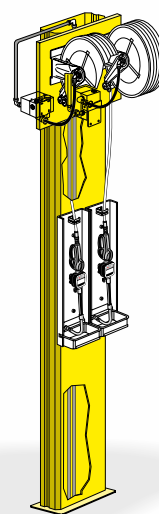

FRONTAL SERVICE COLUMNS

P/N 0E39323

Frontal service column ► suitable for 3 hose reels + 4 hose reels S. 260 mounted like below picture

No1 packing m³ 0,265 kg 54,5

OVERALL DIMENSIONS P:130 H:2450 L:860 mm

P/N 0E39334

Frontal service column ► suitable for 4 hose reels + 4 hose reels S. 260 mounted like below picture

No1 packing m³ 0,460 kg 84,5

OVERALL DIMENSIONS P:240 H:2510 L:1100 mm

P/N 0E39335

Frontal service column ► suitable for 5 hose reels + 4 hose reels S. 260 mounted like below picture

No1 packing m³ 0,460 kg 91


OVERALL DIMENSIONS P:240 H:2510 L:1340 mm

P/N 900



Modular drip-tray, Equipped with hook for gun and removable drip-tray. Applied under the hose reel, it is a handy holder for the delivery gun. Essential for a clean and orderly workplace




CEILING INSTALLATION

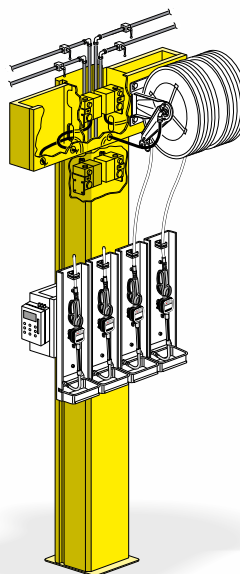


FLOOR INSTALLATION

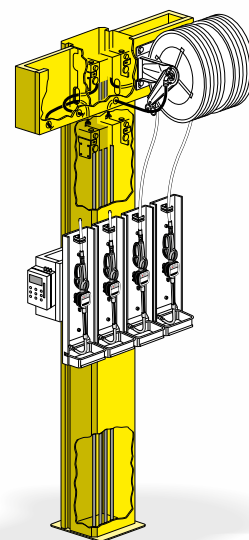

Universal drillings for application of accessories



Suitable for the installation of the FCS system



Holes for drip tray

FRONTAL SERVICE COLUMNS

P/N 0E39351

Frontal service column ► suitable for 2 hose reels + 1 drum 180 - 220 kg

No2 packing m³ 1,080 kg 161

OVERALL DIMENSIONS P:895 H:2600 L:1100 mm

P/N 0E39352

Frontal service column ► suitable for 3 hose reels + 2 drums 180 - 220 kg

No2 packing m³ 1,120 kg 183,5

OVERALL DIMENSIONS P:895 H:2600 L:1450 mm

P/N 0E39901

Containment tank ► suitable for 1 drum 180 - 220 Kg (capacity 197 litre)

No1 packing m³ 0,525 kg 51

OVERALL DIMENSIONS P:830 H:350 L:1000 mm

P/N 0E39902


Containment tank ► suitable for 2 drums 180 - 220 Kg (capacity 266 litre)

No1 packing m³ 0,670 kg 64,5


OVERALL DIMENSIONS P:830 H:350 L:1350 mm




SUMP CAPACITY

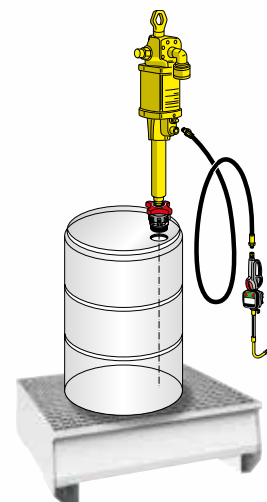


Sump capacity is at least 1/3 of the total volume stored or not less than the biggest barrel, whichever is the greater



Universal drillings for application of accessories



Holes for application of suction pump



Holes for drip tray

FRONTAL SERVICE COLUMNS

P/N 0E39304

Frontal service column ► suitable for 4 hose reels

No 1 packing m³ 0,520 kg 136


OVERALL DIMENSIONS P:485 H:2340 L:1070 mm

P/N 0E39307


Frontal service column ► suitable for 6 hose reels

No 1 packing m³ 0,650 kg 166



OVERALL DIMENSIONS P:485 H:2340 L:1550 mm



Universal drillings for application of accessories



Delivery gun-hose hook

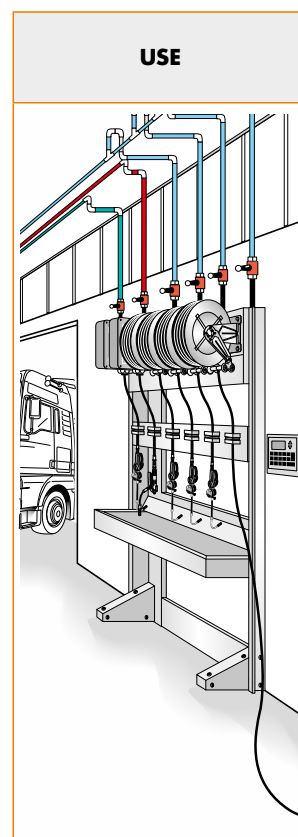

Drip-tray

BILATERAL SERVICE COLUMNS

P/N 0E39314

Bilateral service column ► suitable for 4 hose reels + 2 hose reels S. 260 mounted on the bottom side (see below picture)

No1 packing m³ 0,77 kg 265




OVERALL DIMENSIONS P:600 H:2640 L:1290 mm

P/N 0E39317


Bilateral service column ► suitable for 6 hose reels + 2 hose reels S. 260 mounted on the bottom side (see below picture)

No1 packing m³ 0,86 kg 305


OVERALL DIMENSIONS P:600 H:2640 L:1770 mm

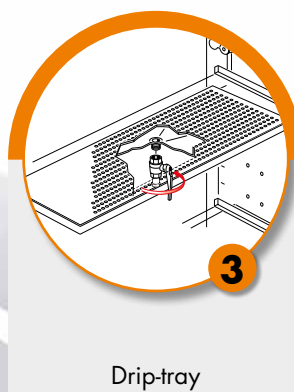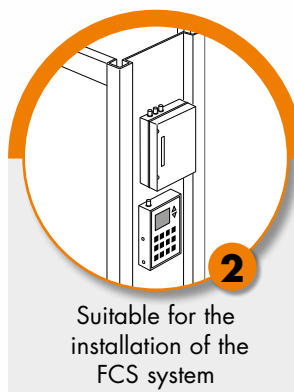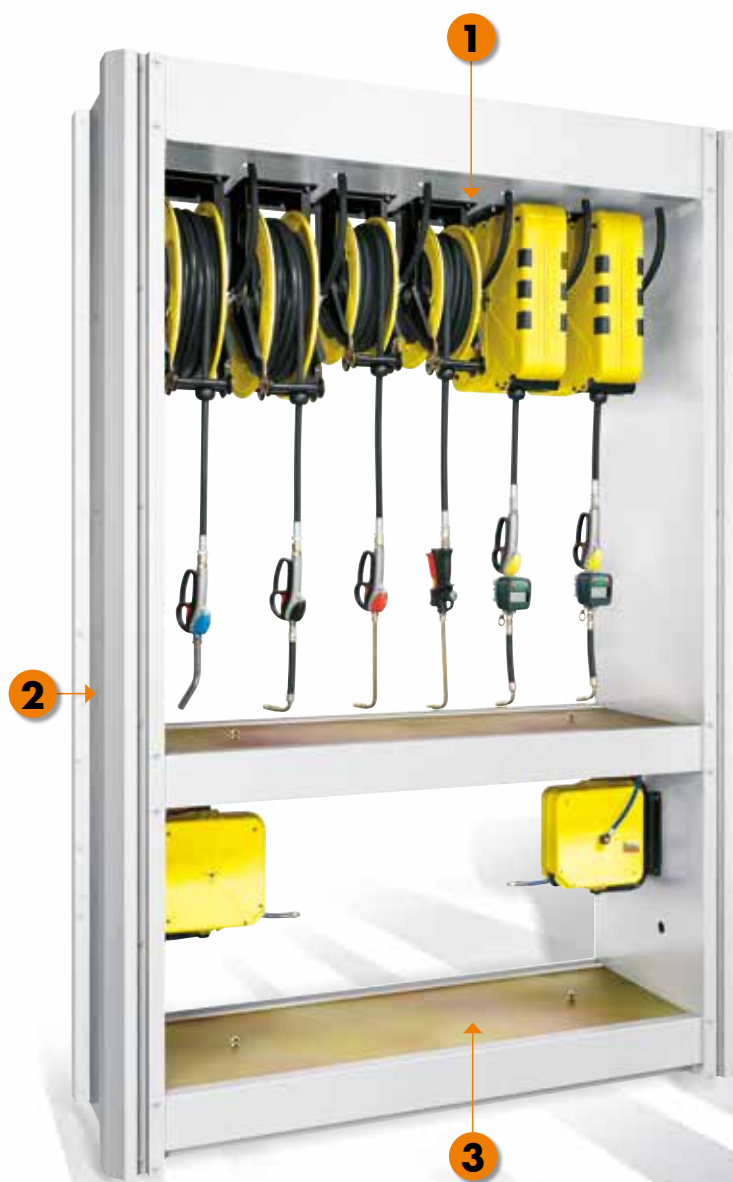

CEILING INSTALLATION

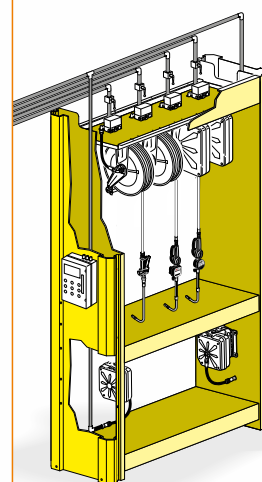

FLOOR INSTALLATION

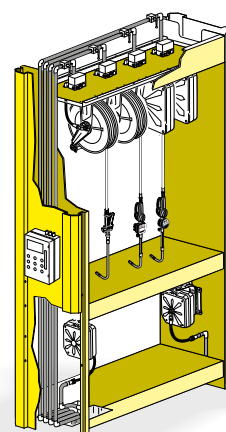



FRONTAL/BILATERAL SERVICE COLUMNS

P/N OE39336

Bilateral service column ► suitable for 3 + 3 + 4 hose reels S. 260 mounted like (see below picture)

No1 packing m³ 0,460 kg 86

OVERALL DIMENSIONS P:240 H:2510 L:860 mm

P/N OE39338

Bilateral service column ► suitable for 4 + 4 + 4 hose reels S. 260 mounted like (see below picture)

No1 packing m³ 0,460 kg 94



OVERALL DIMENSIONS P:240 H:2510 L:1100 mm

P/N OE39340


Bilateral service column ► suitable for 5 + 5 + 4 hose reels S. 260 mounted like (see below picture)

No1 packing m³ 0,460 kg 101


OVERALL DIMENSIONS P:240 H:2510 L:1340 mm

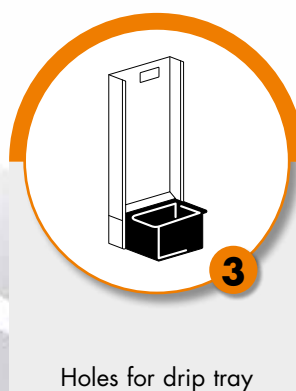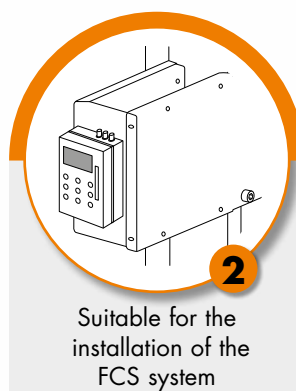

CEILING INSTALLATION

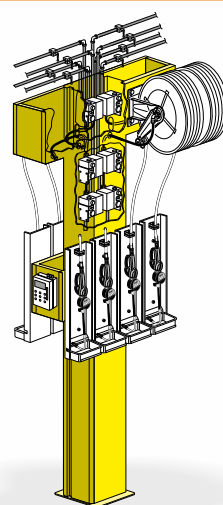

FLOOR INSTALLATION

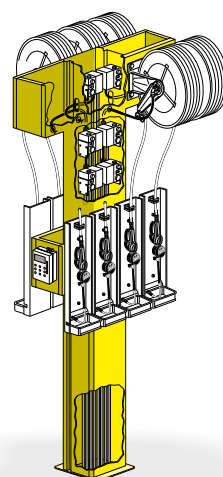

BILATERAL SERVICE COLUMNS

P/N OE39324

Bilateral service column ► suitable for 4 + 2 hose reels S. 260 mounted on the bottom side

 No 1 packing m³ 1,035  kg 228



OVERALL DIMENSIONS  P: 505 H: 2685 L: 1452 mm

P/N OE39328


Bilateral service column ► suitable for 8 + 2 hose reels S. 260 mounted on the bottom side

 No 1 packing m³ 1,035  kg 276


OVERALL DIMENSIONS  P: 505 H: 2685 L: 2503 mm

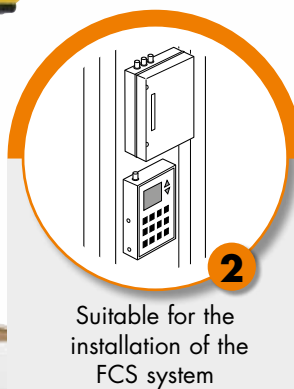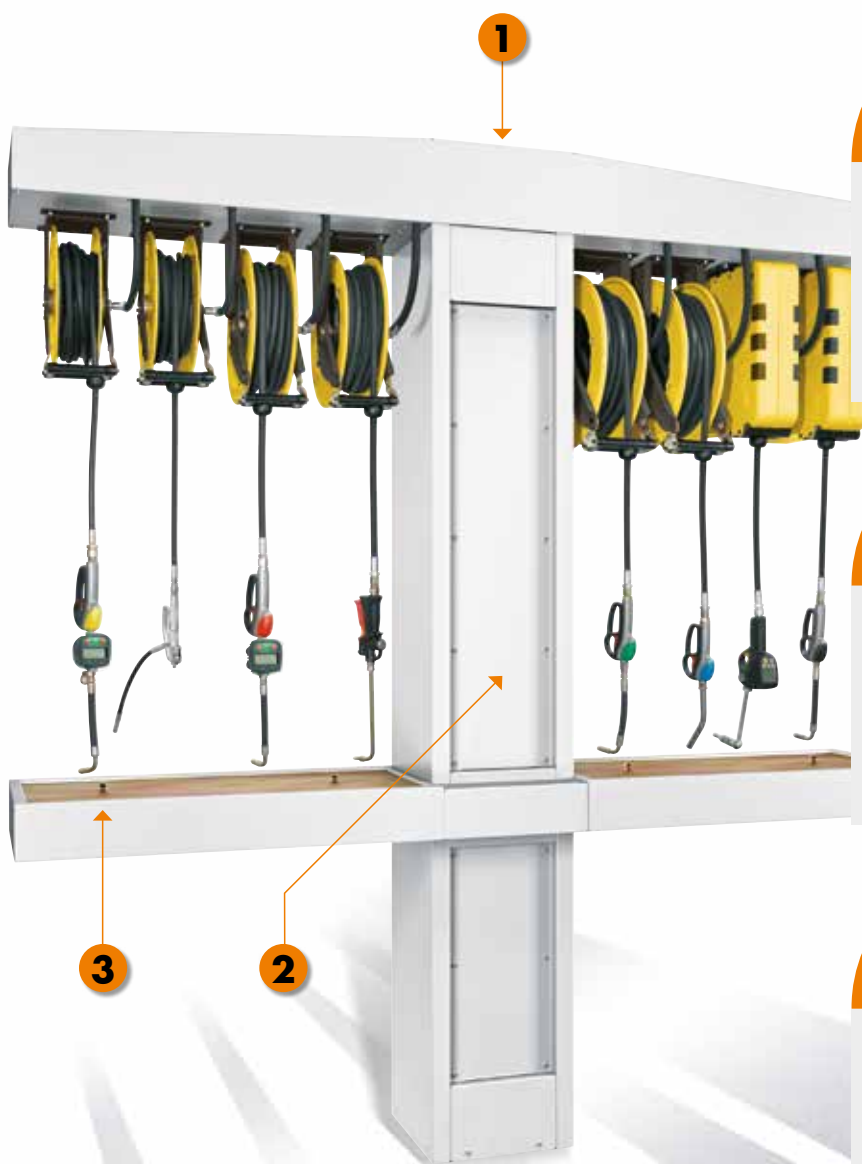

CEILING INSTALLATION

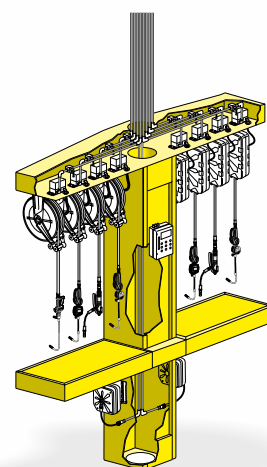

FLOOR INSTALLATION

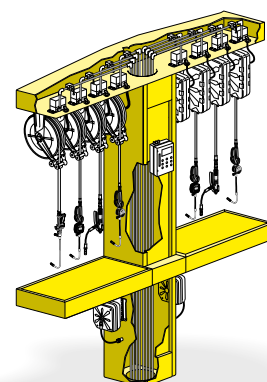

Supplied with:


- Polythene hose with brass coupling
- brass swivel joint
- "Viton" seals
- central shaft in galvanized steel
- 1,5 m inlet hose to connect at the system



SWIVELLING WALL SUPPORT WITH BAYONET HOOKING

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 260	260/11	11m 8x12 (911/11)	M1/4"G	M1/4"G
	260/12	11m 6x10 (901/11)	M1/4"G	M1/4"G

OVERALL DIMENSIONS

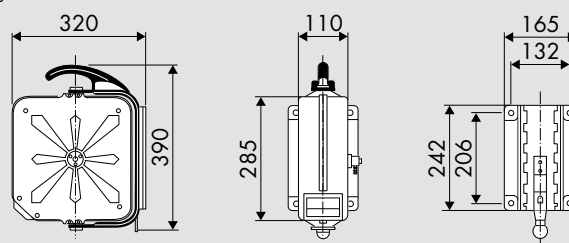


No 1 packing m³ 0,025 kg 6,5

SWIVELLING SIMPLE WALL SUPPORT

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 260	261/11	11m 8x12 (911/11)	M1/4"G	M1/4"G
	261/12	11m 6x10 (901/11)	M1/4"G	M1/4"G

OVERALL DIMENSIONS

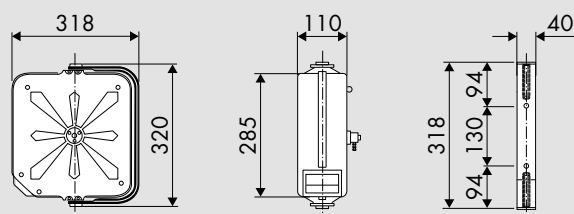


No 1 packing m³ 0,025 kg 6

P/N 260/01


Wall bracket with bayonet hooking. The placing of several brackets in the service points allows the hose reel to be easily moved to the various workstations.

To prevent removal or theft of the hose reel it can be locked with a bolt or padlock




EXAMPLE OF INSTALLATION


Standard installation on the wall



Bench installation



Ceiling installation





Atex 94/9
II 3 GD c X

IIB 2 GD c T4 T135°C X
(only for P/N 430/10 -
P/N 530/10)



Supplied with:


- hose in black synthetic rubber with galvanized steel coupling
- brass swivel joint
- "Viton" seals
- central shaft in galvanized steel or stainless steel AISI 304
- inlet hose 0,6 m to connect the hose reel to the system (standard on the versions with hose)
- shock proof drum in painted steel or ABS

For the **SWIVELLING** version add the suffix **"/SO"** at the P/N.
For example 430/10/SO

INDUSTRIAL HOSE REELS IN PAINTED STEEL


	P/N	Hose supplied	Connection	
			inlet	outlet
S. 430	430/10	without hose	F 1/2"G	F 1/2"G
	430/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	430/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	430/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	430/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G
S. 4430 ABS	4430/10	without hose	F 1/2"G	F 1/2"G
	4430/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	4430/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	4430/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	4430/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G
S. 530	530/10	without hose	F 1/2"G	F 1/2"G
	530/11	20m 1/2" (962/20)	F 1/2"G	M 1/2"G
	530/12	25m 1/2" (962/25)	F 1/2"G	M 1/2"G

OVERALL DIMENSIONS

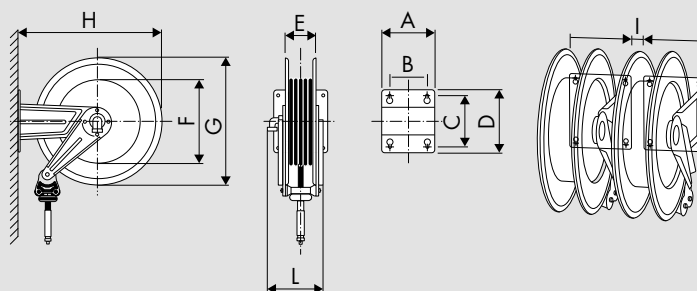

Series	A	B	C	D	E	F	G	H	I	L	1-m³	Kg
430	186	140	196	226	115	261	420	460	20	215	0,098	from 16 to 22,5
530	203	153	220	258	115	328	510	560	20	230	0,120	from 22 to 31,5

EXEMPLE TO USE

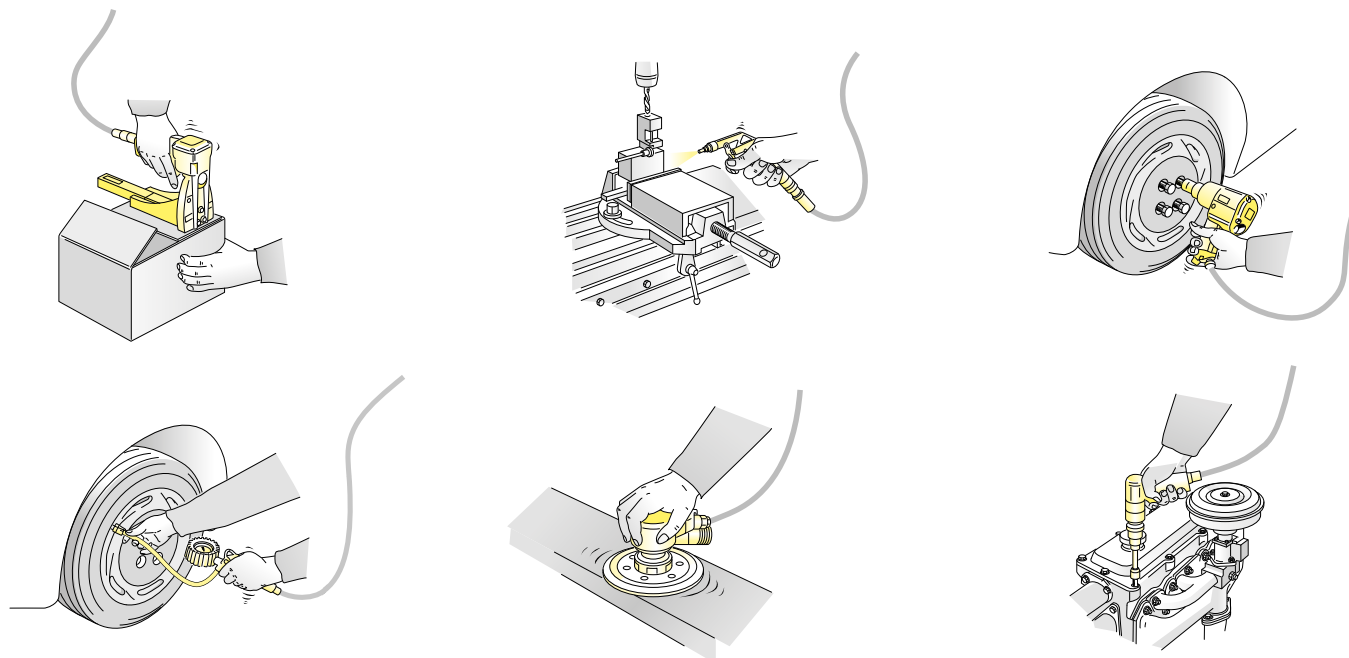



Atex 94/9
II 3 GD c X

IIB 2 GD c T4 T135°C X
(only for P/N 440/10)



Supplied with:


- hose in black synthetic rubber with galvanized steel coupling
- swivel joint in brass or galvanized steel
- "Viton" or "Polyurethane" seals
- central shaft in galvanized steel
- inlet hose from 0,6 m to 1m to connect the hose reel to the system (standard on the versions with hose)
- internal shock proof drum in painted steel or ABS

For the **SWIVELLING** version
add the suffix **"/SO"** at the P/N.
For example: 440/40/SO

INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 440	440/10	without hose	F 1/2"G	F 1/2"G
	440/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	440/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	440/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	440/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G
S. 4440 ABS	4440/10	without hose	F 1/2"G	F 1/2"G
	4440/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	4440/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	4440/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	4440/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G

OVERALL
DIMENSIONS

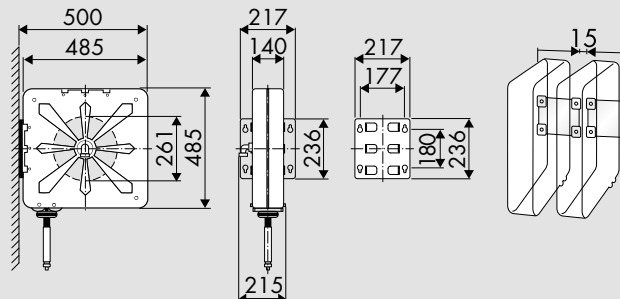

No1 packing m³ 0,111 kg from 23 to 29

CONNECTION HOSES

P/N 901/11	Hose M 1/4" x F 1/4"	▶ ø 6x10 mm	▶ 11m	▶ 20 bar
P/N 911/11	Hose M 1/4" x F 1/4"	▶ ø 8x12 mm	▶ 11m	▶ 20 bar
P/N 911/2	Hose M 1/2" x F 1/2"	▶ ø 8x12 mm	▶ 1,5m	▶ 20 bar
P/N 952/13	Hose M 1/2" x F 1/2"	▶ ø 3/8"	▶ 12m	▶ 20 bar
P/N 952/19	Hose M 1/2" x F 1/2"	▶ ø 3,8"	▶ 18m	▶ 20 bar
P/N 962/10	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 10m	▶ 20 bar
P/N 962/15	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 15m	▶ 20 bar
P/N 962/20	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 20m	▶ 20 bar
P/N 962/25	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 25m	▶ 20 bar

P/N 260/01

Wall bracket with bayonet hooking. The placing of several brackets in the service points allows the hose reel to be easily moved to the various workstations.



Index Articles

P/N	Page
900	20 - 29
OE10/50	17
OE10/51	17
OE10/52	17
OE10/55	17
OE10/56	17
OE10/57	17
OE10/60	15
OE10/61	15
OE10/62	15
OE10/65	15
OE10/66	15
OE10/67	15
OE116F/401	9
OE116F/751	9
OE37801	24
OE37803	25
OE37805	25
OE37806	25
OE37807	25
OE37808	25
OE37811	24
OE37812	25
OE37814	24
OE37815	24
OE37817	25
OE37818	24
OE37819	24
OE37820	24
OE37821	25
OE39304	31
OE39307	31
OE39314	32
OE39317	32
OE39320	28
OE39321	28
OE39322	28
OE39323	29
OE39324	34
OE39328	34
OE39334	29
OE39335	29
OE39336	33
OE39338	33
OE39340	33
OE39351	30
OE39352	30
OE39421	28
OE39422	28
OE39901	30
OE39902	30
OE60280	5
OE60310	5
OE60311	5
OE60410	5
OE60411	5
OE60450	5 - 21
OE60451	5 - 21
OE62041	7
OE62048	7
OE62074	7

P/N	Page
OE62095	7
OE63041	7
OE63048	7
OE63074	7
OE63095	7
OE64000-S	13
OE64001-S	13
OE64021-S	10
OE64031-S	10
OE64032-S	10
OE64033-S	10
OE64033/40-S	11
OE64034-S	10
OE64035-S	10
OE64036-S	11
OE64037-S	11
OE64038-S	11
OE64039-S	12
OE64040-S	11
OE64041-S	11
OE64042-S	12
OE64064-S	12
OE64070-S	12
OE64071-S	13
OE64195-S	14
OE64200-S	14
OE64210-S	14
OE65138	17
OE65142	17
OE65160	17
OE65280	16
OE65309	16
OE65310	16
OE65311	16
OE65312	16
OE65350	16
OE65385	16
OE65420	16
OE65600	16
OE66265	15
OE66310	15
OE66340	15
OE66370	15
OE66400	15
OE66590	15
OE66599	17
OE66661	23
OE66663	23
OE66665	23
OE66667	23
OE66739	23
OE66740	23
OE66741	23
OE66742	23
OE66743	23
OE66855	22
OE66856	23
OE66857	23
OE66860	22
OE66870	22
OE66873	22

P/N	Page
OE66876	22
OE66880	22
OE66881	22
OE66882	22
OE66888	22
OE66889	22
OE66891	21
OE66892	21
OE66893	21
OE66895	21
OE66896	21
OE66897	21
OE68012	4
OE68113	4
OE68213-S	4
OE80035	26
OE80040	26
OE80050	26
OE80200	26
OE80201	27
OE80210	27
OE91C/701	8
OE91F/451	8
260/11	35
260/12	35
261/11	35
261/12	35
430/10	36
430/11	36
430/12	36
430/13	36
430/14	36
430/50	19
430/51	19
430/52	19
430/55	19
430/56	19
440/10	37
440/11	37
440/12	37
440/13	37
440/14	37
440/50	20
440/51	20
440/52	20
440/55	20
440/56	20
4430/10	36
4430/11	36
4430/12	36
4430/13	36
4430/14	36
4430/50	19
4430/51	19
4430/52	19
4430/55	19
4440/10	37
4440/11	37
4440/12	37
4440/13	37
4440/14	37

P/N	Page
4440/50	20
4440/51	20
4440/52	20
4440/55	20
4440/56	20
530/10	36
530/11	36
530/12	36
530/50	19
530/51	19
530/52	19
901/11	37

P/N	Page
911/11	37
911/2	37
932/1	21
932/2	21
935/13	21
935/18	21
935/4	21
952/13	37
952/19	37
957/06	21
957/1	21
957/10	21

P/N	Page
957/2	21
962/10	37
962/15	37
962/20	37
962/25	37
963/25	21
260/01	35 - 37
430/05	20
440/05	20
530/05	20