



CE Made in Italy

RAM
HOISTS
No. E15/SP



HELP THE NATURE

Packaging contains, depending on the articles, one or more of the following materials; they must be recycled in accordance with current regulations in the country of use.

cardboard • polyethylene sack • polystyrene • paper • wood • nails
• plastic strap • cellophane • clips • gummed paper



OUR STRENGTHS POINTS

The widest range of technology for fluidynamics designed to meet all the needs of our clients with cutting-edge solutions, even the most specific.

The quality, reliability and design that have always distinguished the Ecodora brand in the global market.

A technical service before and after sales to recommend the most suitable product according to the customer's needs as well as to provide support to the end users.

OUR GOAL

To meet every user's needs by offering only high quality products.



www.ecodora.com
info@ecodora.com

CE Made in Italy

180 - 220 Kg drums

The pneumatic piston pump hoists make the drum's exchange **simple** and **fast** thanks to the hoisting system with one or two columns activated pneumatically. Additionally models equipped with the follower plate, **will enable you to pump grease** even beyond the NLGI 3 grade, **viscous fluids** and even with high temperatures.

STRENGTH POINTS

► **Facilitates the drum's exchange**

The new base allows the accommodation of a pallet, making the drum's substitution and its proper positioning easier.

► **Unparalleled efficiency**

The pneumatic control of the minimum and maximum drum's level, allows the simplifying of work operations.

► **Adaptable with all types of pumps**

All Ecodora pumps are usable thanks to the brackets and adaptors available on the catalog.

► **Work in safety**

The pressure control group allows the keeping of the pump pressure output under control.


► **Avoids air pockets in the drum**

Thanks to the visible bleeder, all internal air pockets are eliminated from the drum, leaving the work environment clean.


► **For extremely thick fluids**

Ideal for pumping fluids with high viscosity and grease even beyond the NLGI 3 grade (working temperature to be checked).




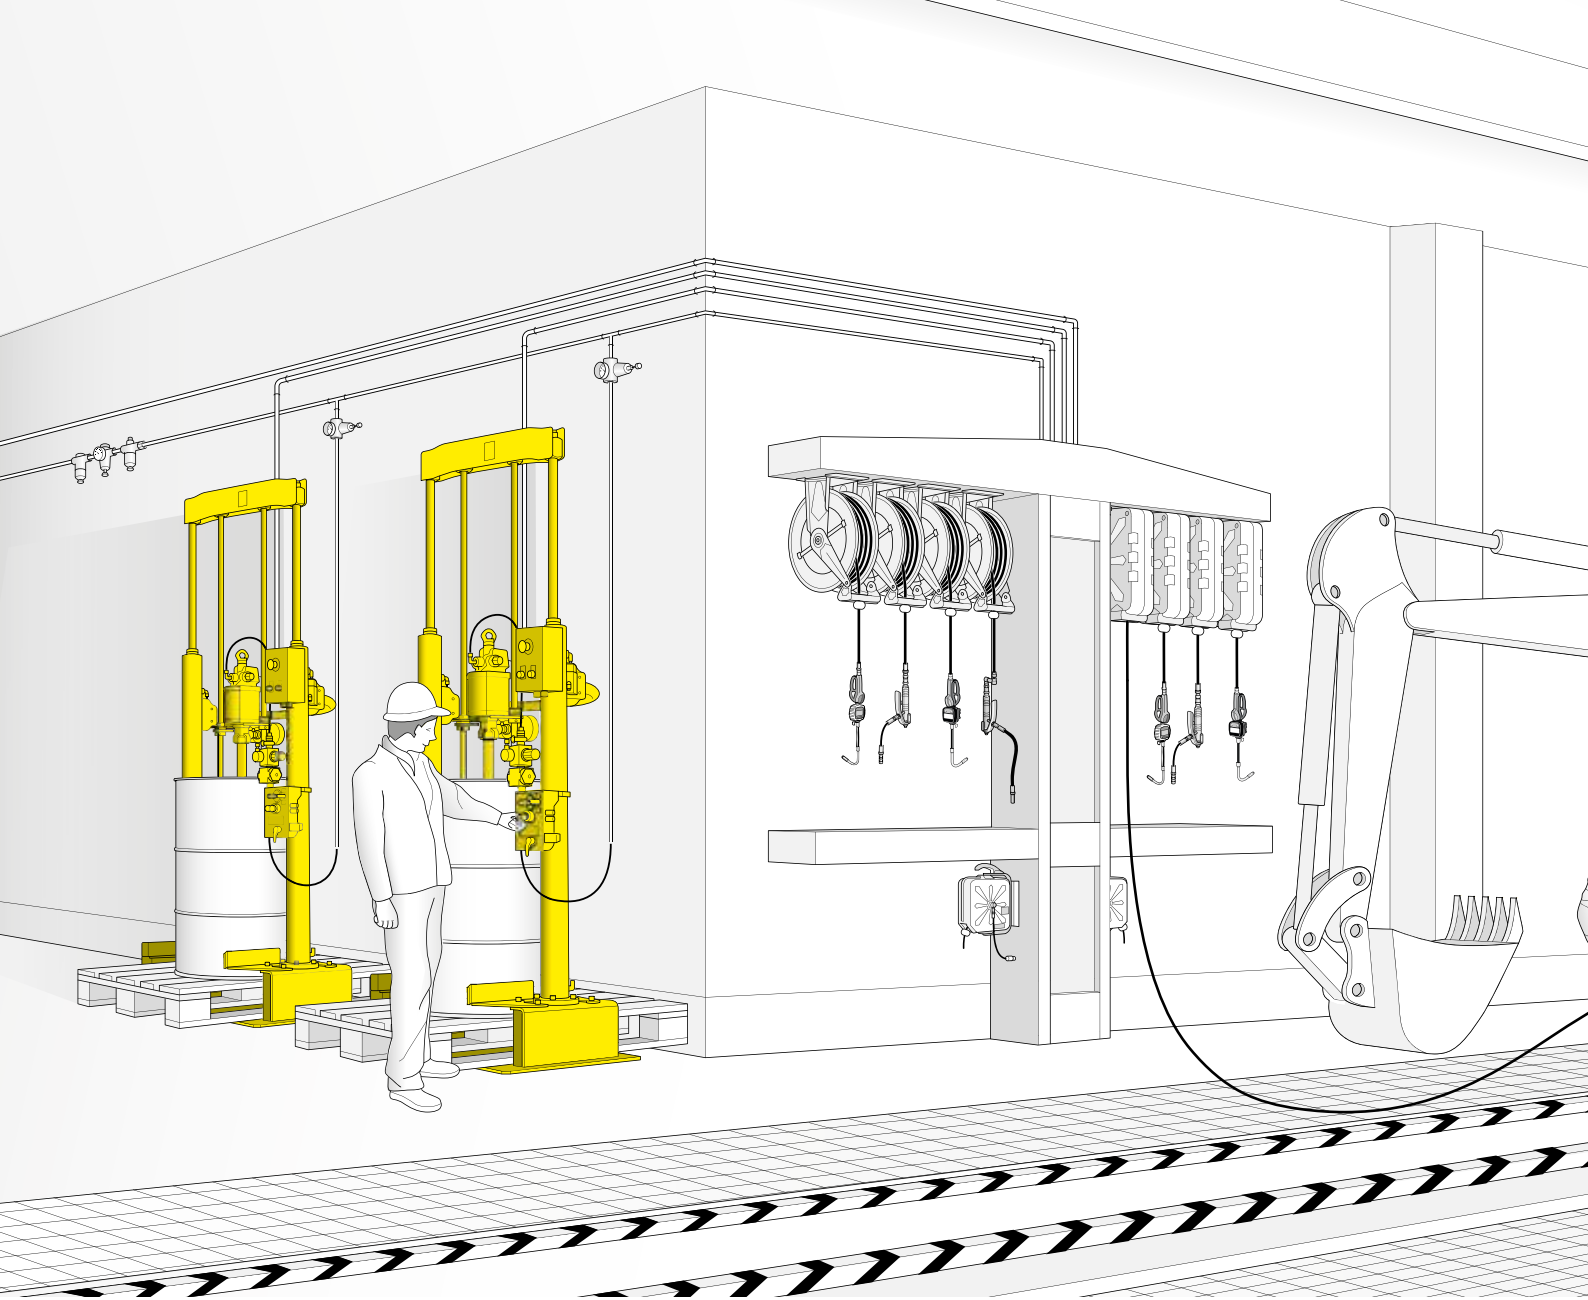

MINING

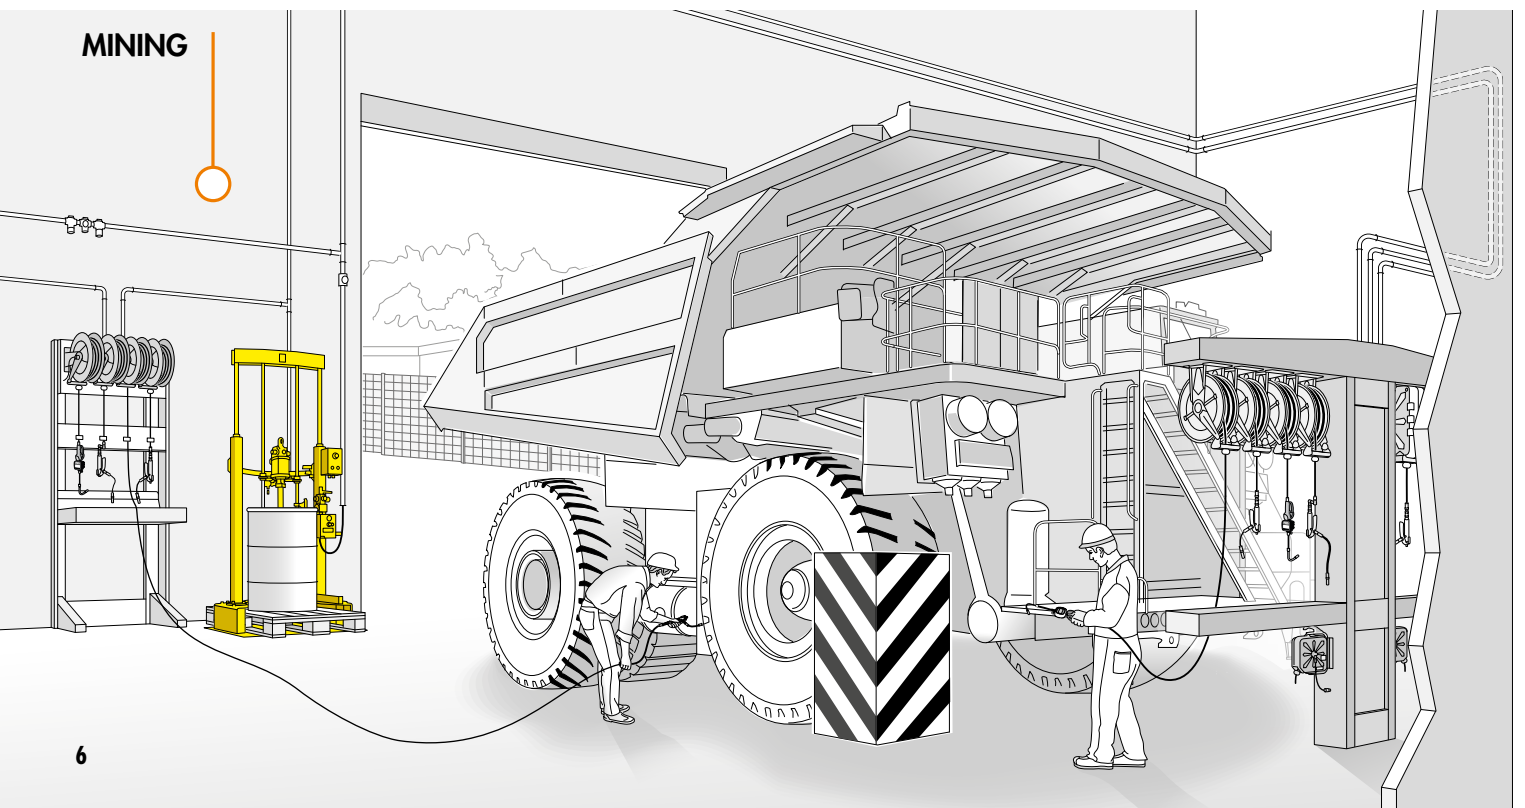

APPLICATION FIELDS

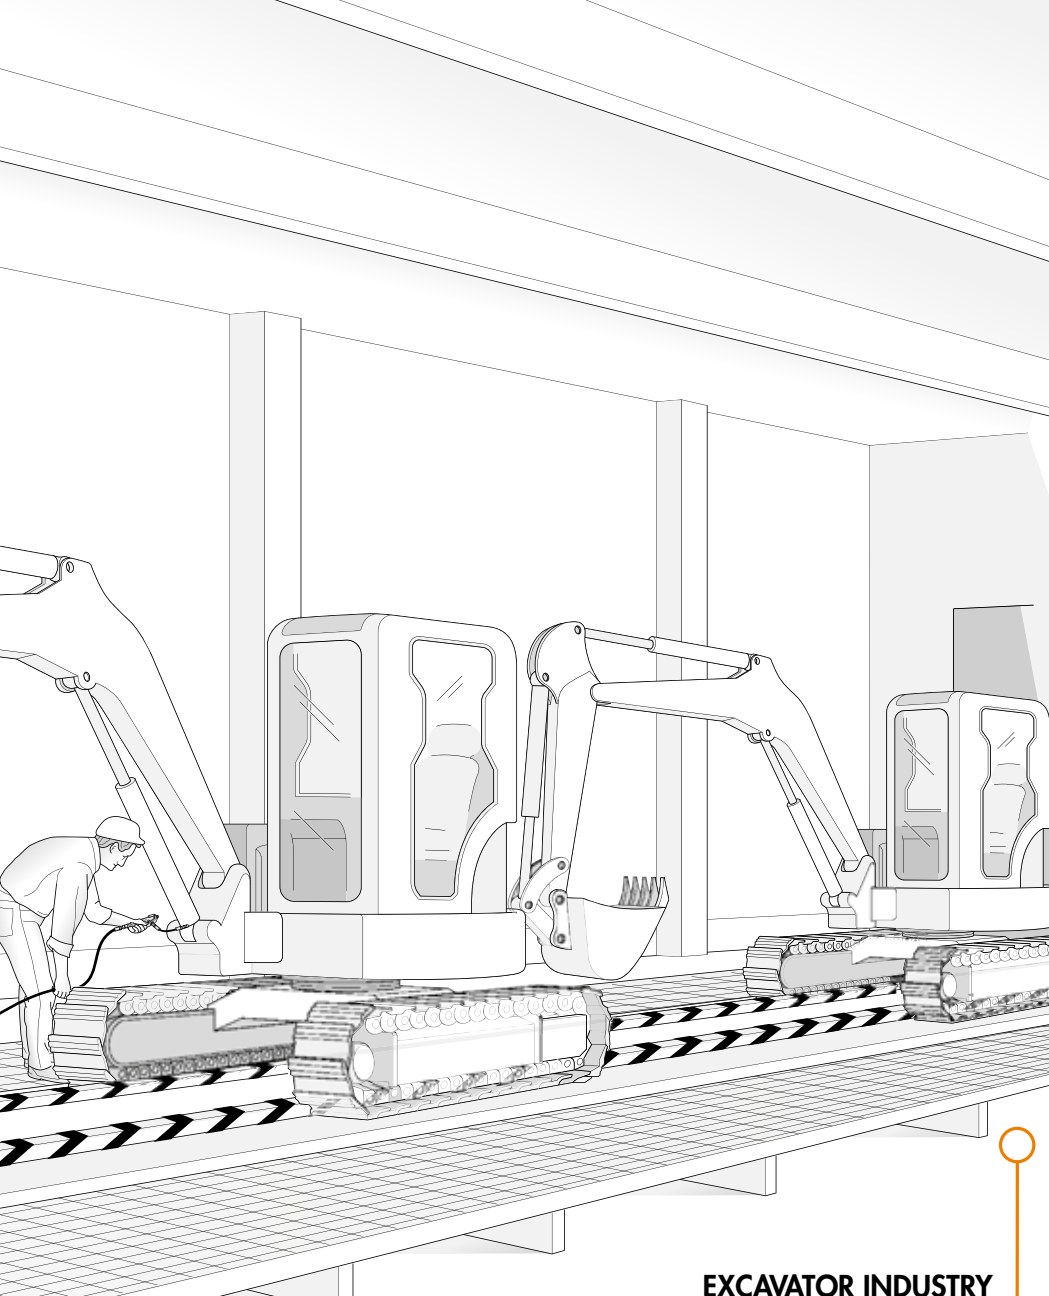


EXCAVATOR INDUSTRY

The hoists for pneumatic piston pumps, operating with follower plate, can compress **grease** even beyond the NLGI 3 grade, **very viscous fluids** and even with high temperatures.

These articles may be used in any industrial contest, requiring the substantial, fast and safe pumping of:

- greases
- oils
- industrial fluids
- paints
- inks
- silicones and glues
- resins
- ... and many others

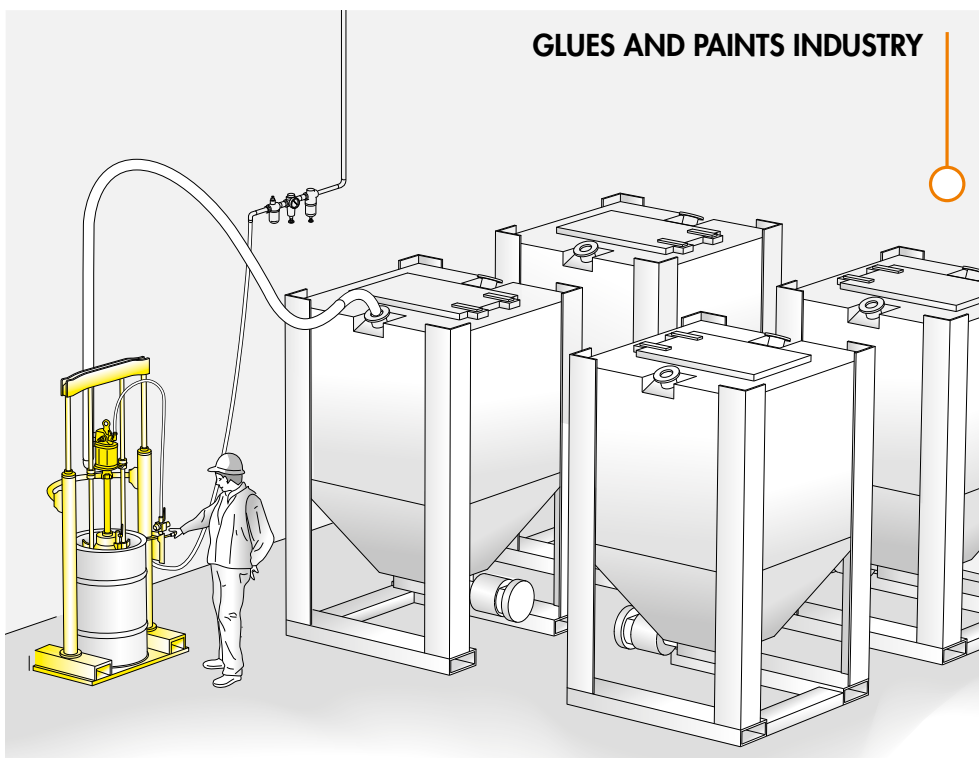


GLUES AND PAINTS INDUSTRY

RAM HOISTS

Technical characteristics


FULL OPTIONAL

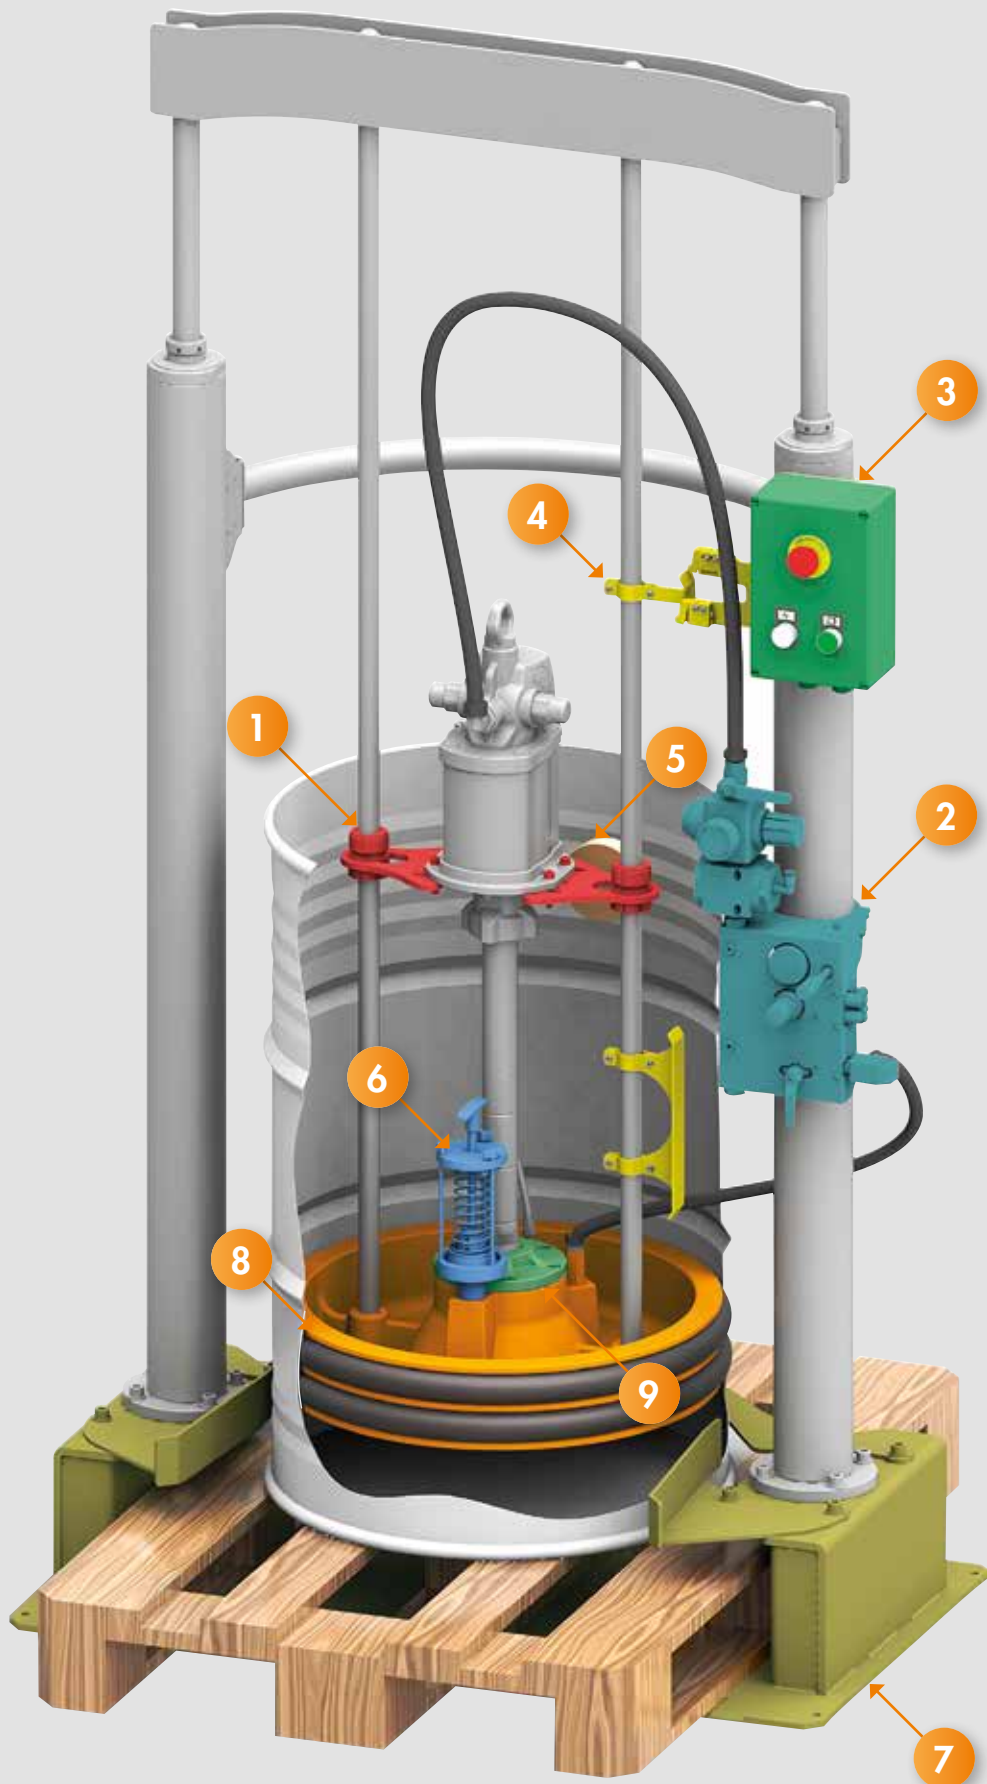

1 Support with pump positioning clamps


STANDARD BRACKETS

All the ram hoists are equipped with 2 standard brackets (A - B) suitable for mounting all our industrial pumps.

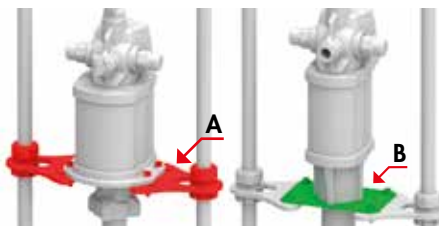


BRACKETS ON REQUEST

KR1102:
Bracket support suitable to mount pump with \varnothing 30 mm suction tube.



2 Pneumatic control panel

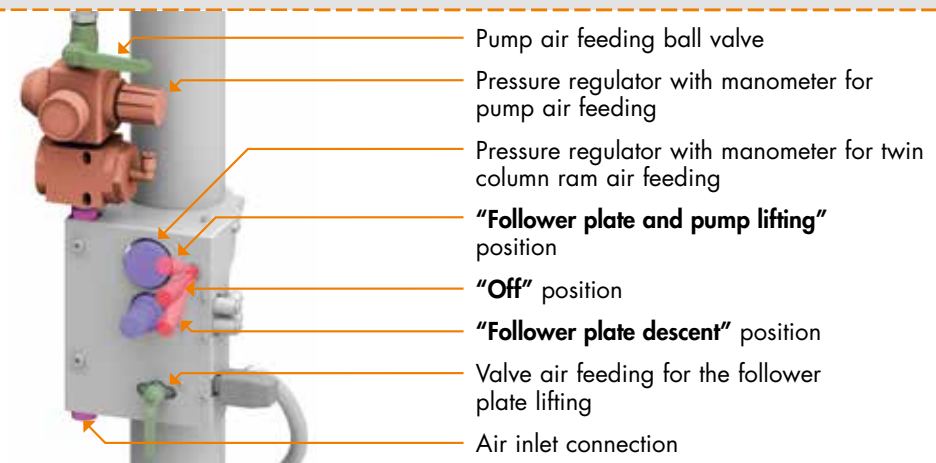

3 Electric-pneumatic hybrid control

4 Minimum and maximum drum level pneumatic control


5 Output pressure group control

6 Visible air bleeder

7 Base suitable for the accommodation of pallets with brackets to center the drum

8 **P/N OE11/60**
Follower plate \varnothing 585 mm with double sealing **NBR** ring, to be used with air operated twin column ram for drums 180 - 220 Kg.
It can be used also with different kind of pumps thanks to special adaptors shown in the below list and available on request, see point 9.

Compatible fluids:
grease and lubricants also with high viscosity, industrial fluids, paints.

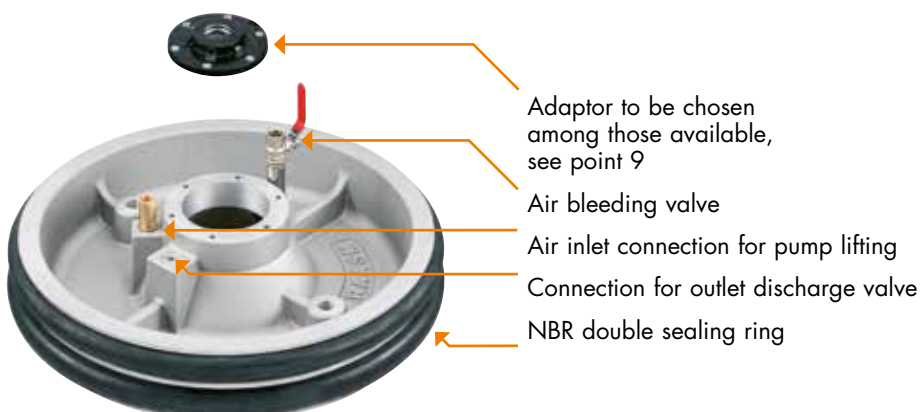


9



P/N OE21/61
Adaptor suitable for pumps with F 1"G suction tube



P/N OE21/62
Adaptor suitable for pumps with F 2"G suction tube



P/N OE21/63
Adaptor + Support (KR1102) suitable for pumps with \varnothing 30 mm suction tube



P/N OE21/64
Adaptor suitable for pumps with \varnothing 45 mm suction tube









P/N OE21/65
Adaptor suitable for pumps with \varnothing 50,8 mm suction tube


The pump elevators are available in single column (with or without basement) or twin column version. It is raised by compressed air, via the side mounted 3-way valve, that allows to change the drum easily and quickly.



Comfortable drum change, pump always mounted



P/N	OE10/80	OE10/81	OE10/82
Column	1 with basement	1 without basement	2 with basement
Suitable for drums	180 - 220 Kg	180 - 220 Kg	180 - 220 Kg
Working temperature	+ 2 °C + 40 °C	+ 2 °C + 40 °C	+ 2 °C + 40 °C
Max pressure	8 bar	8 bar	8 bar
Usable pumps	S. 600 - 700 - 900 1200 - 1500 - 1800	S. 600 - 700 - 900 1200 - 1500 - 1800	S. 600 - 700 - 900 1200 - 1500 - 1800
Noise level	negligible (< 70 db)	negligible (< 70 db)	negligible (< 70 db)
Packing - Gross weight	 N° 1 packing m³ 1,165  Kg 97	 N° 1 packing m³ 0,679  Kg 75	 N° 1 packing m³ 1,406  Kg 128
Height max/min (A - B)	2750 - 1750 mm	2715 - 1715 mm	2750 - 1750 mm
Dimensions (C - D)	866 - 630 mm	140 - 255 mm	1086 - 630 mm

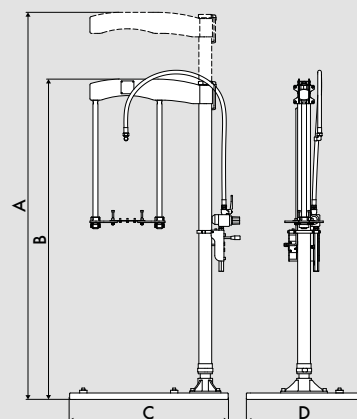

Personalized Kit

In order to satisfy any particular need it is possible to create a **"Personalized kit"**. According to the kind of fluids, please follow the specific column and choose the right part number in each one of the **3 steps**:

GREASE AND VISCOUS FLUIDS PROCEDURE

Choose the ram hoist (see page on the left), and then complete your kit with **Pump, Follower plate and Drum cover**.

OIL AND INDUSTRIAL FLUIDS PROCEDURE

Choose the ram hoist (see page on the left), and then complete your kit with **Pump, Follower plate and Bung adaptor**.

1 >

Grease and viscous fluids pumps



P/N	OE62095	OE63095	OE91F/451	OE91C/701	OE116F/751	OE116F/401	OE151F/701
Series	600	700	900	900	1200	1200	1500
Ratio	50:1	65:1	45:1	70:1	75:1	40:1	70:1
Flow rate	1500 g/min	1900 g/min	4400 g/min	3000 g/min	4400 g/min	10000 g/min	7000 g/min
Seals	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane
Suction tube	940 - ø 30 mm	940 - ø 30 mm	940 - ø 45 mm	940 - ø 45 mm	940 - ø 45 mm	940 - ø 50,8 mm	940 - ø 50,8 mm

Oil and viscous fluids pumps



P/N	OE91C/71	OE91F/71	OE91C/111	OE91F/111	OE116F/121	OE116F/181
Series	900	900	900	900	1200	1200
Ratio	7:1	7:1	11:1	11:1	12:1	18:1
Flow rate	30 l/min	30 l/min	30 l/min	30 l/min	30 l/min	23 l/min
Seals	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane
Suction tube	940 - ø 53 mm	940 - ø 53 mm	940 - ø 45 mm	940 - ø 45 mm	940 - ø 53 mm	940 - ø 45 mm

2 >

Grease and viscous fluids follower plate



P/N OE66590
Follower plate ø 585 mm for pumps with suction tube ø 30 mm
P/N OE10/60
Follower plate ø 585 mm for pumps with suction tube ø 45 mm
P/N OE10/65
Follower plate ø 585 mm for pumps with suction tube ø 50,8 mm

Oil and viscous fluids drum cover



P/N OE10/50
Drum cover ø 600 mm for pumps with suction tube ø 45 mm
P/N OE65160
Drum cover ø 600 mm with thread union 2" F

3 >

Grease and viscous fluids drum cover



P/N OE65600
Drum cover ø 600 mm for pumps with suction tube ø 30 mm
P/N OE10/50
Drum cover ø 600 mm for pumps with suction tube ø 45 mm
P/N OE10/55
Drum cover ø 600 mm for pumps with suction tube ø 50,8 mm

Oil and viscous fluids bung adaptor



P/N OE10/14
Bung adaptor for pumps with suction tube ø 45 mm
P/N OE38051
Bung adaptor for pumps with suction tube ø 50 mm
P/N OE10/15
Bung adaptor for pumps with suction tube ø 50,8 mm

Example

The kit is ready to use.



Example

The kit is ready to use.








The two versions **P/N 10/85** and **P/N 11/85** include the **use of a follower plate with double seal** to facilitate the pumping of grease with high viscosity. They differ according to the type of accommodation base for pallet.



Simple positioning drum,
efficient with viscous grease



P/N	OE10/85	OE11/85
Column	2	2
Suitable for drums	180 - 220 Kg	180 - 220 Kg
Working temperature	+ 2 °C + 40 °C	+ 2 °C + 40 °C
Max pressure	8 bar	8 bar
Usable pumps	S. 600 - 700 - 900 - 1200 - 1500 - 1800	S. 600 - 700 - 900 - 1200 - 1500 - 1800
Noise level	negligible (< 70 db)	negligible (< 70 db)
Pushing force downwards at:	4 bar 432 kg - 6 bar 648 kg - 8 bar 864 kg	4 bar 432 kg - 6 bar 648 kg - 8 bar 864 kg
Basement accommodation pallet	-	11/101
Packing - Gross weight	 N° 1 packing m³ 1,840  Kg 187	 N° 1 packing m³ 1,840  Kg 190
Height max/min (A - B)	2800 - 1800 mm	2800 - 1800 mm
Dimensions (C - D)	1086 - 630 mm	1086 - 630 mm

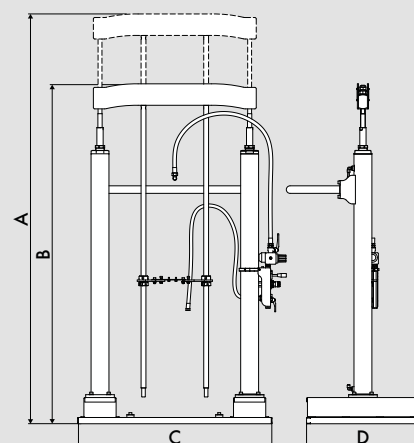

* theoretical valves, friction coefficient has not been considered. Furthermore depression's force created by the pump during suction (+2100 Kg) must be added to the listed figures.









Personalized Kit

In order to satisfy any particular need it is possible to create a **"Personalized kit"**. According to the kind choose the right part number in each one of the **4 steps**:

1 >

Grease, viscous fluids, oil and industrial fluids pumps

Choose the ram hoist (see page on the left), and then complete your kit according with your needs with one of the industrial pump below. We introduce the main versions but all the Ecodora industrial pumps are suitable.

								
P/N	OE150D/61	OE180D/81	OE90F/111	OE115F/181	OE90FSP/451	OE115FSP/751	OE118FSP/401	OE153FSP/701
Series	1500	1800	900	1200	900	1200	1200	1500
Ratio	6:1	8:1	11:1	18:1	45:1	75:1	40:1	70:1
Flow rate	80 l/min	65 l/min	30 l/min	23 l/min	4400 g/min	4400 g/min	10000 g/min	7000 g/min
Seals	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane	polyurethane
Suct. tube	F 2"G	F 2"G	480 - ø 45 mm	480 - ø 45 mm	500 - ø 45 mm	500 - ø 45 mm	600 - ø 50,8 mm	600 - ø 50,8 mm

2 >

Follower plate

Add to the kit the follower plate with double sealing P/N 11/60.



P/N OE11/60
Follower plate
ø 585 mm
with NBR double
seal ring

3 >

Adaptor

Choose the adaptor to mount on the follower plate P/N 11/60 according with the pump suction tube diameter (see page 9).

P/N OE21/61

Adaptor suitable for pumps with F 1"G suction tube

P/N OE21/62

Adaptor suitable for pumps with F 2"G suction tube

P/N OE21/63

Adaptor + Support (KR1102) suitable for pumps with ø 30 mm suction tube

P/N OE21/64

Adaptor suitable for pumps with ø 45 mm suction tube

P/N OE21/65

Adaptor suitable for pumps with ø 50,8 mm suction tube



4 >

Optional

If you need or if you want something more add one of the available optional introduced on page 17.



Example

The kit is ready to use.











Air-operated twin column ram hoist with industrial pump.

It is raised and lowered by compressed air, via the side mounted 3-way valve. Essential when pumping high viscosity and heavy fluids since ram pushes down the follower plate helping pump working. It is suitable for 180- 220 Kg drums.



useful with higher viscosity grease and higher distances




P/N	OE10/1561P1N	OE10/1881P1N	OE10/09111P1N	OE10/12181P1N	
Twin column ram	OE10/85	OE10/85	OE10/85	OE10/85	
Follower plate in NBR	OE11/60	OE11/60	OE11/60	OE11/60	
Adaptor	OE21/62	OE21/62	OE21/64	OE21/64	
Pump with seals in PU	OE150D/61	OE180D/81	OE90F/111	OE115F/181	
Ratio	6:1	8:1	11:1	18:1	
Flow rate	80 l/min	65 l/min	30 l/min	23 l/min	
Suction tube	F 2" G	F 2" G	ø 45 mm	ø 45 mm	
Pump connection hose	OE996.3015	OE996.3015	OE996.3015	OE996.3015	
Follower plate connection hose	OE995.301	OE995.301	OE995.301	OE995.301	
Suitable for drums	180 - 220 Kg	180 - 220 Kg	180 - 220 Kg	180 - 220 Kg	
Packing - Gross weight	 N° 1 packing m³ 1,8  Kg 247	 N° 1 packing m³ 1,8  Kg 250	 N° 1 packing m³ 1,8  Kg 220	 N° 1 packing m³ 1,8  Kg 224	
Height max/min (A - B)	2800 - 1800 mm	2800 - 1800 mm	2800 - 1800 mm	2800 - 1800 mm	
Dimensions (C - D)	1086 - 630 mm	1086 - 630 mm	1086 - 630 mm	1086 - 630 mm	

The kits offered in these two pages differ in the industrial pneumatic pumps installed. Usable with drums from 180 to 220 kg, they are designed to pump also very viscous fluids and grease at various distances. According to the personal needs, choose the most suitable model and, eventually, personalize it with the accessories on page 17.



OE10/12401P1N	OE10/09451P1N	OE10/12751P1N	OE10/15701P1N
OE10/85	OE10/85	OE10/85	OE10/85
OE11/60	OE11/60	OE11/60	OE11/60
OE21/65	OE21/64	OE21/64	OE21/65
OE118FSP/401	OE90FSP/451	OE115FSP/751	OE153FSP/701
40:1	45:1	75:1	70:1
10 kg/min	4,4 kg/min	4,4 kg/min	7 kg/min
ø 50,8 mm	ø 45 mm	ø 45 mm	ø 50,8 mm
OE996.3015	OE996.3015	OE996.3015	OE996.3015
OE995.301	OE995.301	OE995.301	OE995.301
180 - 220 Kg	180 - 220 Kg	180 - 220 Kg	180 - 220 Kg
<div> <div></div> <div>N° 1 packing m³ 1,8</div> <div></div> <div>Kg 225</div> </div>	<div> <div></div> <div>N° 1 packing m³ 1,8</div> <div></div> <div>Kg 223</div> </div>	<div> <div></div> <div>N° 1 packing m³ 1,8</div> <div></div> <div>Kg 225</div> </div>	<div> <div></div> <div>N° 1 packing m³ 1,8</div> <div></div> <div>Kg 231</div> </div>
2800 - 1800 mm	2800 - 1800 mm	2800 - 1800 mm	2800 - 1800 mm
1086 - 630 mm	1086 - 630 mm	1086 - 630 mm	1086 - 630 mm

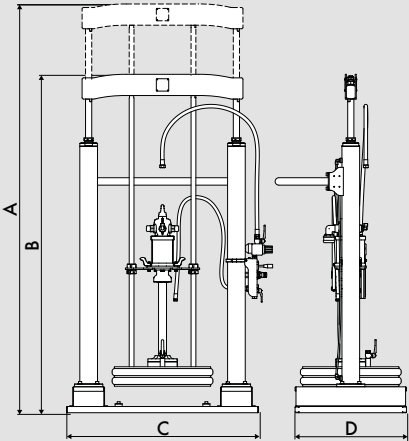

Air operated twin column ram hoist with industrial pump. The underlying models include as a standard accessory the accommodation base pallet, essential for positioning easily and correctly the pallet where the drum rests. Additionally, various accessories are available, which increase the safety and functionality of the article, assembled singularly or simultaneously according to the code. Only the model "Full Optional" P/N 11/12751P1ND presents all the equipment listed on pages 8 and 9. Kits are suitable for drums from 180 to 220 kg.












Customizable for
higher safety
and functionality

FULL OPTIONAL


see page 8-9



P/N	OE11/12401P1N	OE11/12751P1N	OE11/12401P1NG	OE11/12751P1ND
Twin column ram	OE11/85	OE11/85	OE11/85	OE11/85
Follower plate in NBR	OE11/60	OE11/60	OE11/60	OE11/60
Adaptor	OE21/65	OE21/64	OE21/65	OE21/64
Pump with seals in PU	OE118FSP/401	OE115FSP/751	OE118FSP/401	OE115FSP/751
Ratio	40:1	75:1	40:1	75:1
Flow rate	10 kg/min	4,4 kg/min	10 kg/min	4,4 kg/min
Suction tube	ø 50,8 mm	ø 45 mm	ø 50,8 mm	ø 45 mm
Pump connection hose	OE996.3015	OE996.3015	OE996.3015	OE996.3015
Follower plate connection hose	OE995.301	OE995.301	OE995.301	OE995.301
Suitable for drums	180 - 220 Kg	180 - 220 Kg	180 - 220 Kg	180 - 220 Kg
Pneumatic limit switch	-	-	OE11/130	OE11/130
Visible drain valve	-	-	11/102	OE11/102
Electric pneumatic hybrid control	-	-	-	OE11/140
System pressure relief valve	-	-	-	OE11/103
Packing - Gross weight	 N° 1 packing m³ 1,8  Kg 275	 N° 1 packing m³ 1,8  Kg 215	 N° 1 packing m³ 1,8  Kg 275	 N° 1 packing m³ 1,8  Kg 285
Height max/min (A - B)	2950 - 1950 mm	2950 - 1950 mm	2950 - 1950 mm	2950 - 1950 mm
Dimensions (C - D)	1086 - 630 mm	1086 - 630 mm	1086 - 630 mm	1086 - 630 mm

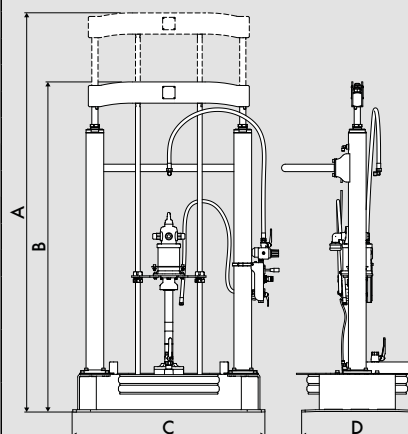

Ram hoist accessories 180 - 220 Kg

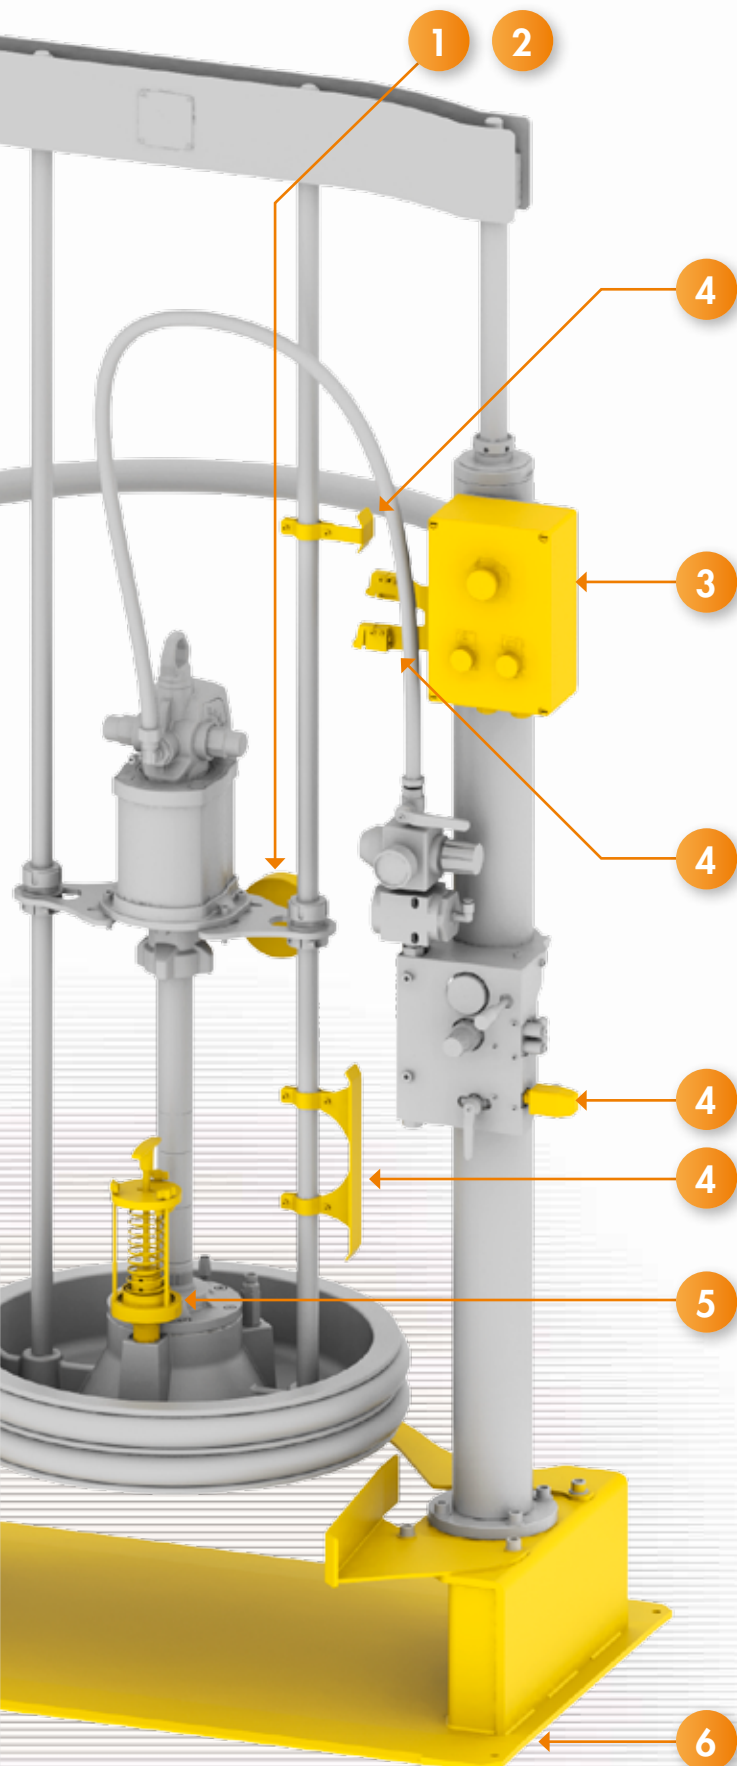

1

P/N OE11/104
System maximum
pressure relief valve
(pump output), which
can be manually set



2

P/N OE11/103
(to integrate with
P/N 11/140)
Outlet pneumatic
system pressure
relief valve




3

P/N OE11/140
(to integrate with
P/N 11/103)
Hybrid electricpneumatic
control: features a system
discharge timer manually
settable, which activates
valve P/N 11/103

4

P/N OE11/130
Pneumatic controls
of the maximum and
minimum drum's
levels



5

P/N OE11/102
Visible air bleeder for fluid
press hoist: eliminates air
pockets inside the drum,
leaving a clean environment

6

P/N OE11/101
Hoist base for pallet
accommodation to facilitate drum's
substitution







**18 - 30 Kg
drums**




APPLICATION FIELDS

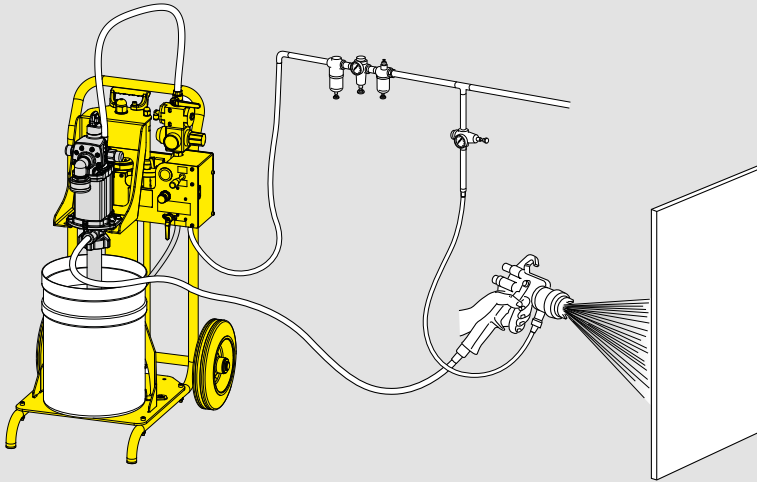

Fluid distribution system
(for paints, lubricants, protective liquids, etc.)
with spray gun.

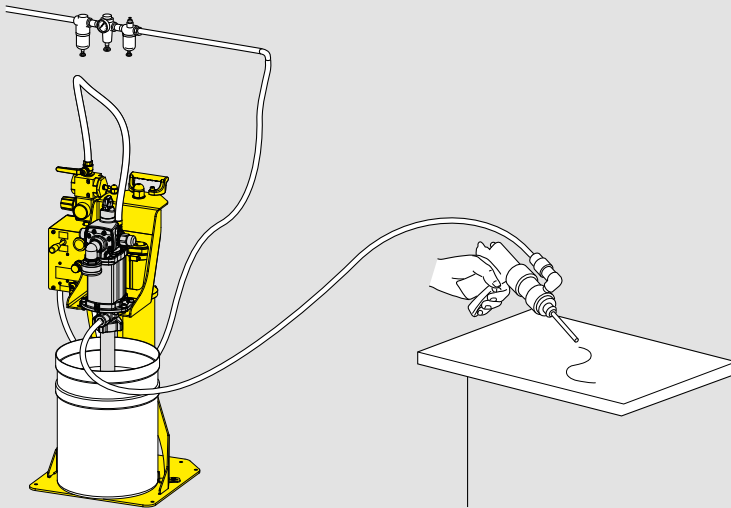

Automated system for the delivery of preselected quantities
of fluids (inks, paints, greases, etc.).

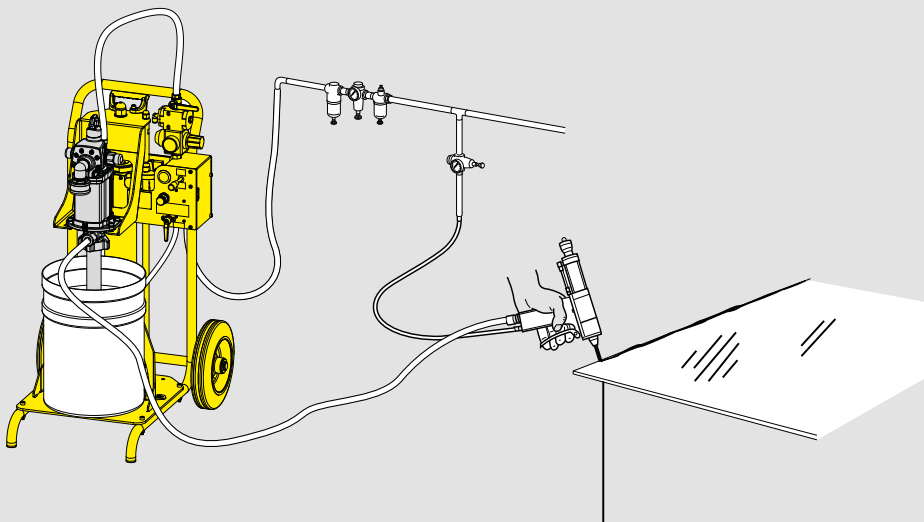

Application of sealants, adhesives, greases, etc.,
by means of special delivery gun.

The pneumatic piston pump hoists, operating with follower plate, can compress **grease** even beyond the NLGI 3 grade, **very viscous fluids** and even with high temperatures.


These articles can be used in any industrial contest that might need the substantial, fast and safe pumping:

- **greases**
- **oils**
- **industrial fluids**
- **paints**
- **inks**
- **silicones and glues**
- **resins**
- **... and many others**


RAM HOISTS

Technical characteristics

FULL OPTIONAL

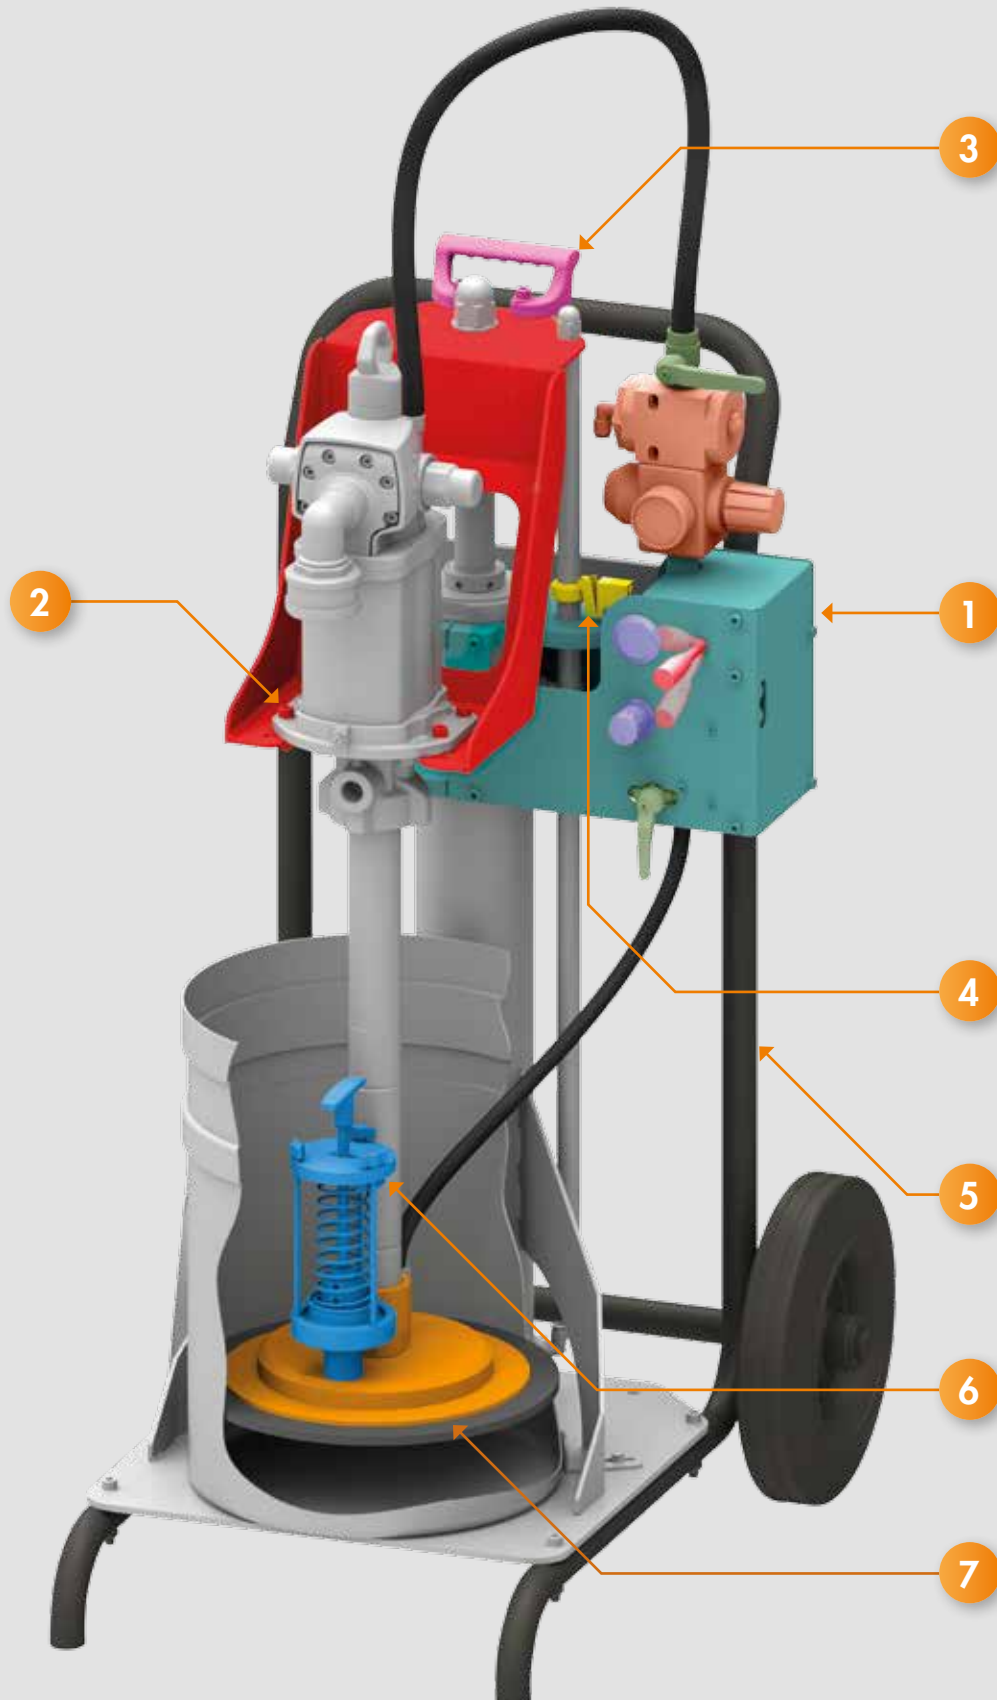

1 Pneumatic control panel

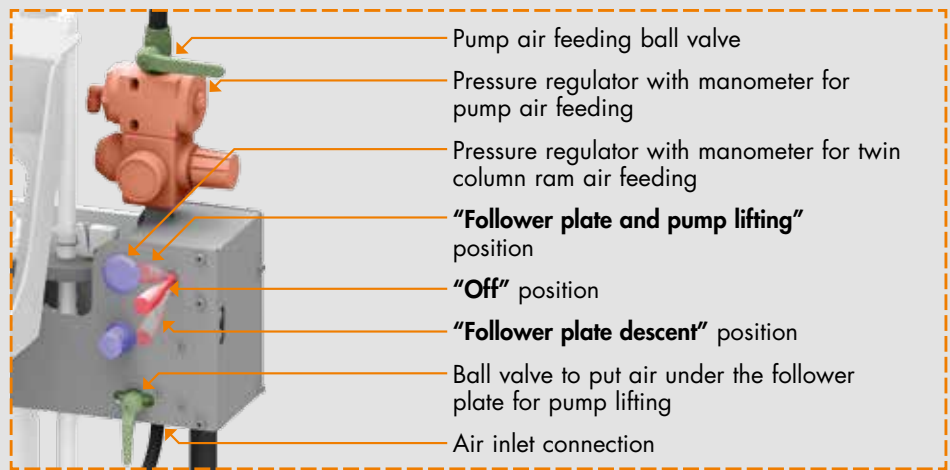

2 Support with pump positioning clamps

3 Handle to facilitate the moving of the cart

4 Minimum drum level pneumatic control

5 Trolley for the kit

6 Visible air bleeder





7 Follower plate


✓ STRENGTH POINTS

- ▶ **Facilitates the exchange of the drum**
the base allows both the drum's exchange and its correct positioning.
- ▶ **Unparalleled efficiency:**
the pneumatic control of the drum's minimum level simplifies the work operations.
- ▶ **Convenience in any situation:**
the drum's movable cart allows the easy moving of the pump to get close to the distribution point.
- ▶ **For small size drums:**
for small size drums: designed to accommodate the needs of those who work with drums from 18 to 30 kg.
- ▶ **Avoids air pockets in the drum:**
thanks to the visible air bleeder, all air pockets are eliminated from inside the drum, leaving a clean work environment.
- ▶ **For extremely dense fluids:**
ideal for pumping fluids with high viscosity, exceeding the NLGI 3 grade (work temperature to be checked).

Air-operated single column ram hoist with industrial pump. It is raised and lowered by compressed air, via the side mounted 3-way valve. Essential when pumping high viscosity and heavy fluids since ram pushes down the follower plate helping pump working. It is suitable for 18 - 30 Kg drums. **The follower plate available on request, is suitable for drums with max diameter 310 mm and max height 490 mm.**



P/N	OE12/85	OE12/85B
Suitable for drums	18 - 30 Kg	18 - 30 Kg
Minimum level pneumatic control	no	yes
Working temperature	+ 2 °C + 40 °C	
Max pressure	3 bar	
Usable pumps	S. 900 - 1200	
Noise level	negligible (< 70 db)	
Pushing force downwards at:	1 bar 55 kg - 1,5 bar 81 kg	
Packing - Gross weight	 N° 1 packing m³ 0,3  Kg 61,1	 N° 1 packing m³ 0,3  Kg 61,6
Height max/min (A - B)	1460 - 970 mm	1460 - 970 mm
Dimensions (C - D)	500 - 480 mm	500 - 480 mm

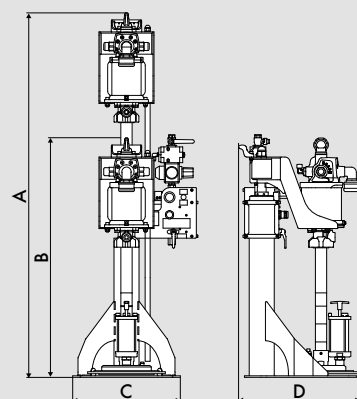

* theoretical valves, friction coefficient has not been considered. Furthermore depression's force created by the pump during suction (+2100 Kg) must be added to the listed figures.


Personalized kit

In order to satisfy any particular need it is possible to create a **"Personalized kit"**. According to the kind of fluids, choose the right part number in each one of the 4 steps:

1 >

Grease, viscous fluids, oil and industrial fluids pumps

Choose the ram hoist (see page on the left), and then complete your kit according with your needs with one of the industrial pump below.

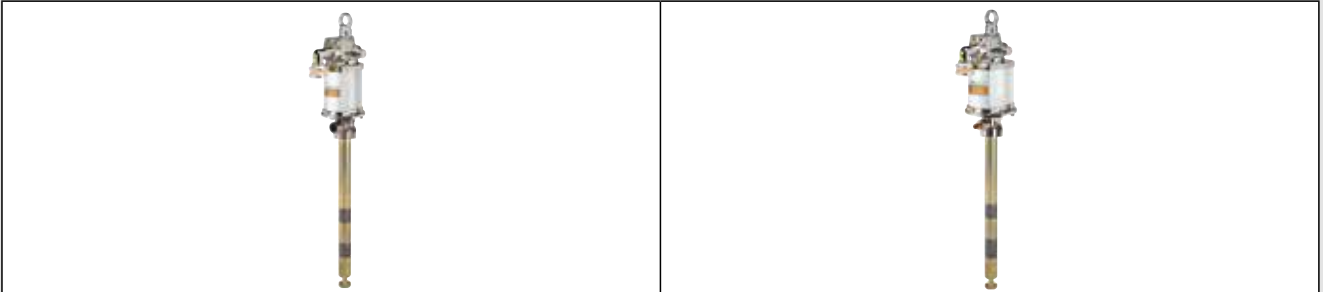

P/N	OE90FPM/451	OE115FPM/751
Series	900	1200
Ratio	45:1	75:1
Flow rate	4400 g/min	4400 g/min
Seals	polyurethane	polyurethane
Suction tube	500 - ø 45 mm	500 - ø 45 mm

2 >

Follower plate

Add to the kit the follower plate.



P/N OE11/34
Follower plate
ø 310 mm
with NBR seal ring
and suction tube
adaptor ø 45 mm

3 >

Trolley

Choose if you want a mobile unit.



P/N OE80030
Trolley for ram
hoist
18 - 30 Kg

4 >

Optional

If you need something more add one of the available optional introduced on page 26.



Example

The kit
is ready
to use.



















Air operated single column ram hoist with industrial pump. The following models, with or without trolley, provide some useful accessories to increase the safety and functionality of the article, assembled singularly or simultaneously, according to the code. Only the models "Full Optional" P/N 22/09451PING and P/N 22/12751PING present all the equipment listed on pages 20 and 21. Kits are suitable for drums from 18 to 30 kg. **The available membrane is suitable for drums with a max \varnothing of 310 mm and a max height of 490 mm.**



Flexibility
and safety



P/N without TROLLEY	OE12/09451P1N	OE12/12751P1N	OE12/09451P1NA	OE12/12751P1NA	
P/N with TROLLEY	OE22/09451P1N	OE22/12751P1N	OE22/09451P1NA	OE22/12751P1NA	
Twin column ram	OE12/85	OE12/85	OE12/85	OE12/85	
Follower plate in NBR	OE11/34	OE11/34	OE11/34	OE11/34	
Pump with seals in PU	OE90FMP/451	OE115FMP/751	OE90FMP/451	OE115FMP/751	
Ratio	45:1	75:1	45:1	75:1	
Flow rate	4400 g/min	4400 g/min	4400 g/min	4400 g/min	
Suction tube	500 mm	500 mm	500 mm	500 mm	
Visible air bleeder	-	-	11/102	11/102	
Minimum level pneumatic control	no	no	no	no	
Pump connection hose	OE996.301	OE996.301	OE996.301	OE996.301	
Follower plate connection hose	OE993.201	OE993.201	OE993.201	OE993.201	
Suitable for drums	18 - 30 kg	18 - 30 kg	18 - 30 kg	18 - 30 kg	
Packing - Gross weight (without trolley)	 N° 1 packing m³ 0,58  Kg 79,4	 N° 1 packing m³ 0,58  Kg 81,0	 N° 1 packing m³ 0,58  Kg 80,0	 N° 1 packing m³ 0,58  Kg 81,6	
Packing - Gross weight (with trolley)	 N° 1 packing m³ 0,58  Kg 96,1	 N° 1 packing m³ 0,58  Kg 97,7	 N° 1 packing m³ 0,58  Kg 76,7	 N° 1 packing m³ 0,58  Kg 98,3	
Height max/min (A - B) *	1560 - 1070 mm	1560 - 1070 mm	1560 - 1070 mm	1560 - 1070 mm	
Dimensions (C - D)	610 - 725 mm	610 - 725 mm	610 - 725 mm	610 - 725 mm	


* dimensions without trolley see page 22

Kits P/N 22/09451P1NB and P/N 22/12751P1NB on this page feature all the available accessories to make the single column ram hoist the most performant possible. In particular, kits are on movable trolley to facilitate the moving of the pump and they offer the visible air bleeder and the pneumatic control of the minimum level of the drum.

FULL OPTIONAL
see page 20-21




	OE12/09451P1NB	OE12/12751P1NB	OE12/09451P1NG	OE12/12751P1NG
	OE22/09451P1NB	OE22/12751P1NB	OE22/09451P1NG	OE22/12751P1NG
	OE12/85B	OE12/85B	OE12/85B	OE12/85B
	OE11/34	OE11/34	OE11/34	OE11/34
	OE90FMP/451	OE115FMP/751	OE90FMP/451	OE115FMP/751
	45:1	75:1	45:1	75:1
	4400 g/min	4400 g/min	4400 g/min	4400 g/min
	500 mm	500 mm	500 mm	500 mm
	-	-	11/102	11/102
	yes	yes	yes	yes
	OE996.301	OE996.301	OE996.301	OE996.301
	OE993.201	OE993.201	OE993.201	OE993.201
	18 - 30 kg	18 - 30 kg	18 - 30 kg	18 - 30 kg
	N° 1 packing m³ 0,58 Kg 80,0	N° 1 packing m³ 0,58 Kg 81,5	N° 1 packing m³ 0,58 Kg 80,5	N° 1 packing m³ 0,58 Kg 82,1
	N° 1 packing m³ 0,58 Kg 96,6	N° 1 packing m³ 0,58 Kg 98,2	N° 1 packing m³ 0,58 Kg 97,2	N° 1 packing m³ 0,58 Kg 98,8
	1560 - 1070 mm	1560 - 1070 mm	1560 - 1070 mm	1560 - 1070 mm
	610 - 725 mm	610 - 725 mm	610 - 725 mm	610 - 725 mm

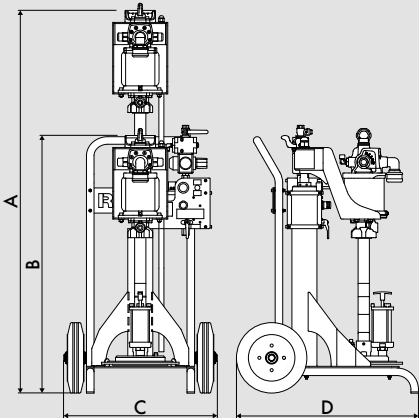

Ram hoist accessories 18 - 30 Kg



- 1** P/N OE11/104
System pressure
relief valve



- 2** P/N OE12/130
Pneumatic control
of the minimum
drum's levels

- 3** P/N OE11/102
Visible air bleeder for fluid
press hoist, eliminates air
pockets inside the drum
leaving the environment
clean



- 4** P/N OE11/34
Membrane \varnothing 310 mm
with NBR seal ring
and 45 mm \varnothing suction
tube adaptor

- 5** P/N OE80030
Trolley suitable for
18 to 30 kg drums

